APP CRS	Rwy Ldg	6250
283°	TDZE	906
	Apt Elev	912

RNAV (GPS) RWY 28


WAUKESHA COUNTY (UES)

RNP APCH - GPS.


Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use MWC altimeter setting and increase all MDAs 60 feet and LNAV visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climbing right turn to 3000 direct HAWKN and hold.


ATIS	MILWAUKEE APP CON	WAUKESHA TOWER★	GND CON	UNICOM
118.875	125.35 307.0	123.7 (CTAF) L	121.6	122.95

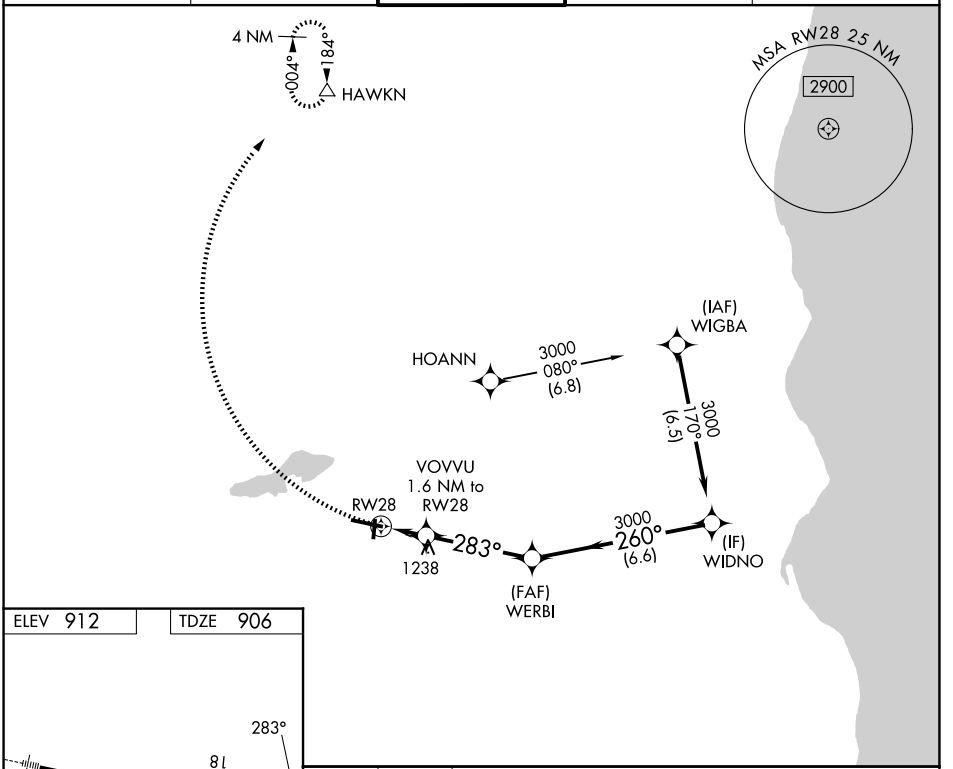

ELEV 912 TDZE 906



3000	HAWKN △	VGSI and descent angles not coincident (VGSI Angle 3.75/TCH 42).

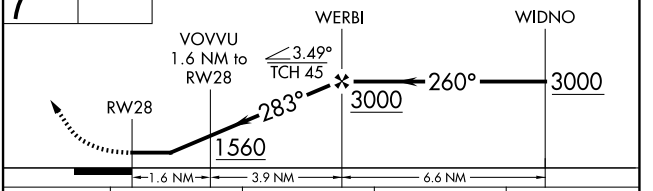

CATEGORY	A	B	C	D
LNAV MDA	1500-1 594 (600-1)		1500-1¾ 594 (600-1¾)	
CIRCLING	1500-1 588 (600-1)		1540-1¾ 628 (700-1¾)	1640-2¼ 728 (800-2¼)

HIRL Rwy 10-28 L
MIRL Rwy 18-36 L
REIL Rwys 18, 28 and 36 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026