WAAS	APP CRS	Rwy Ldg	6201
CH 87015	058°	TDZE	2105
W06A		Apt Elev	2105

RNAV (GPS) RWY 6
NEW RIVER VALLEY (PSK)


RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 44°C. When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet. VDP and Baro-VNAV NA when using Blacksburg altimeter setting. Inop table does not apply to LPV all Cats and LNAV Cats A and B. For inop MALSR, increase LNAV Cat C visibility to 1¼ SM. Circling NA for Cat D northwest of Rwy 6-24.


MALSR A5

MISSED APPROACH: Climb to 6000 direct OHICE and right turn via track 171° to FAPOM and via track 186° to WILIZ and hold.

AWOS-3	ROANOKE APP CON	ROANOKE CLNC DEL	UNICOM
127.375	126.0 339.8	121.7	122.7 (CTAF) L

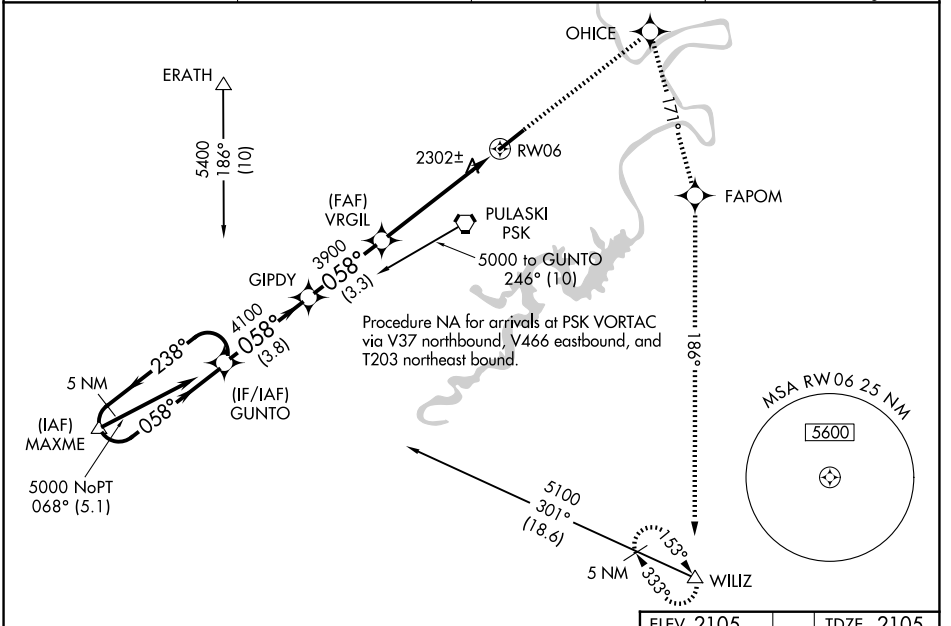

ELEV 2105 TDZE 2105

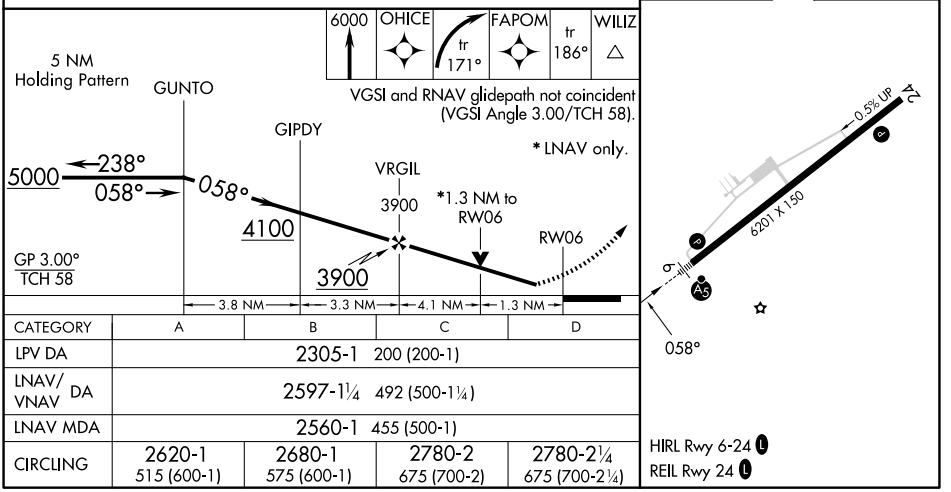

CATEGORY	A	B	C	D
LPV DA	2305-1 200 (200-1)			
LNAV/VNAV DA	2597-1¼ 492 (500-1¼)			
LNAV MDA	2560-1 455 (500-1)			
CIRCLING	2620-1 515 (600-1)	2680-1 575 (600-1)	2780-2 675 (700-2)	2780-2¼ 675 (700-2¼)

HIRL Rwy 6-24 L
REIL Rwy 24 L

NE-3, 29 OCT 2026 to 26 NOV 2026