RNAV (GPS) RWY 35

AUSTIN MUNI (AUM)

WAAS	APP CRS	Rwy Ldg	5800
CH 99506	352°	TDZE	1231
W35A		Apt Elev	1234

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.

MALSR


MISSED APPROACH: Climb to 2900 direct MAROE and hold.


AWOS-3PT	ROCHESTER APP CON ★	UNICOM
120.675	119.8 251.125	122.7 (CTAF) L

MISSED APCH FIX



ELEV 1234 TDZE 1231

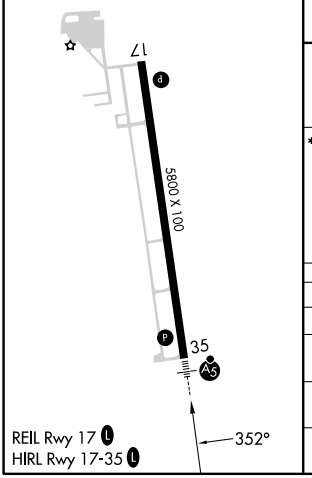

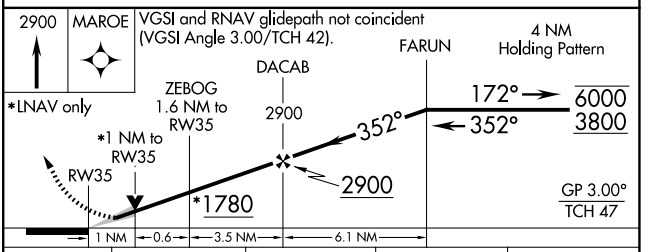

CATEGORY	A	B	C	D
LPV DA	1431-½ 200 (200-½)			
LNAV/VNAV DA	1483-½ 252 (300-½)			
LNAV MDA	1580-½ 349 (400-½)		1580-⅝ 349 (400-⅝)	
CIRCLING	1700-1 466 (500-1)		1800-1½ 566 (600-1½)	1880-2 646 (700-2)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026