RNAV (GPS) RWY 32


MICHAEL J SMITH FLD (MRH)

WAAS	APP CRS	Rwy Ldg	3511
CH 69227	321°	TDZE	10
W32A		Apt Elev	10


DME/DME RNP-0.3 NA. ATC clearance required to penetrate R-5306A and R-5306C. When local altimeter setting not received, use Cherry Point MCAS (Cunningham Fld) altimeter setting and increase all MDA 40 feet; increase LP Cats C and D visibility ⅛ mile. Straight-in Rwy 32 NA at night, Circling Rwy 8, 14, 32 NA at night. Rwy 8, 14, 32 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct ISUJU and on track 326° to EWN VOR/DME and hold.


ASOS	CHERRY POINT APP CON	CLNC DEL	UNICOM
135.375	132.575 299.6	125.65	122.8 (CTAF) L

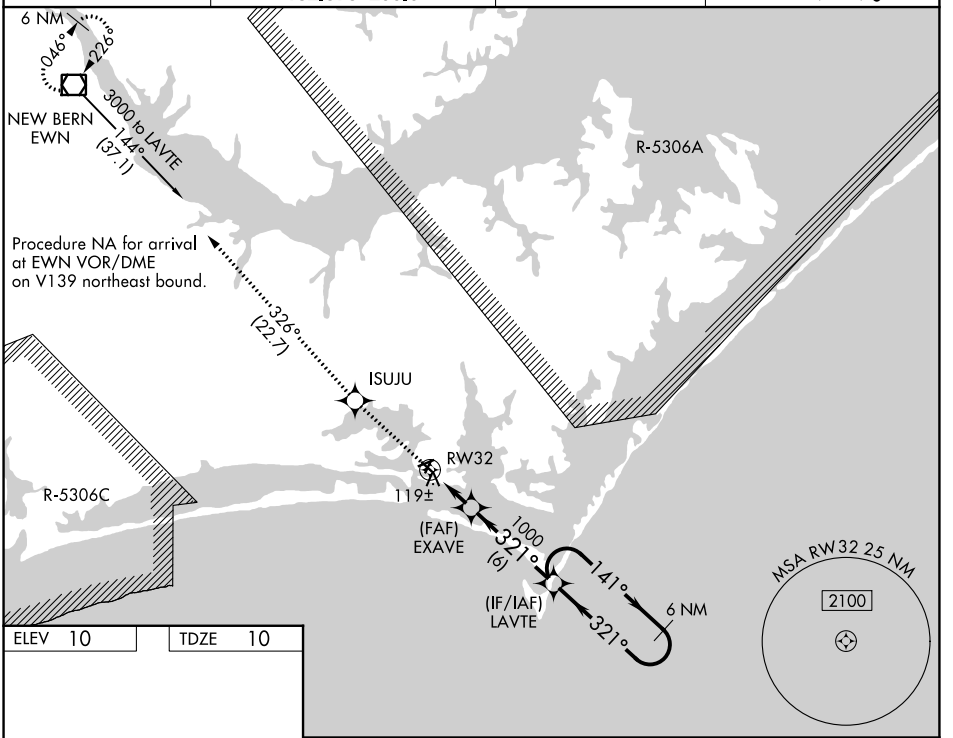

ELEV 10	TDZE 10



REIL Rwys 8 and 26 L
MIRL Rwys 3-21 and 8-26 L

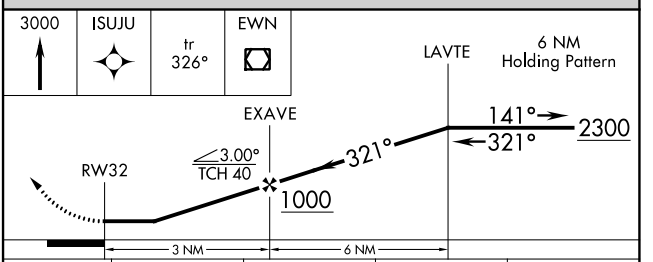

CATEGORY	A	B	C	D
LP MDA	380-1 370 (400-1)			
LNAV MDA	460-1 450 (500-1)		460-1⅜ 450 (500-1⅜)	
CIRCLING	540-1 530 (600-1)		580-1½ 570 (600-1½)	580-2 570 (600-2)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026