WAAS CH 56409 W01A	APP CRS 011°	Rwy Ldg 11500 TDZE 312 Apt Elev 312

RNAV (GPS) Y RWY 1R

WASHINGTON DULLES INTL (IAD)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat C/D visibility to 1⅜ SM.


ALSF-2

MISSED APPROACH: Climb to 780, then climbing right turn to 3000 direct JCOBY and hold.

D-ATIS	POTOMAC APP CON	DULLES TOWER	GND CON
134.85	120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	121.9 317.8 (EAST) 121.625 348.6 (WEST)

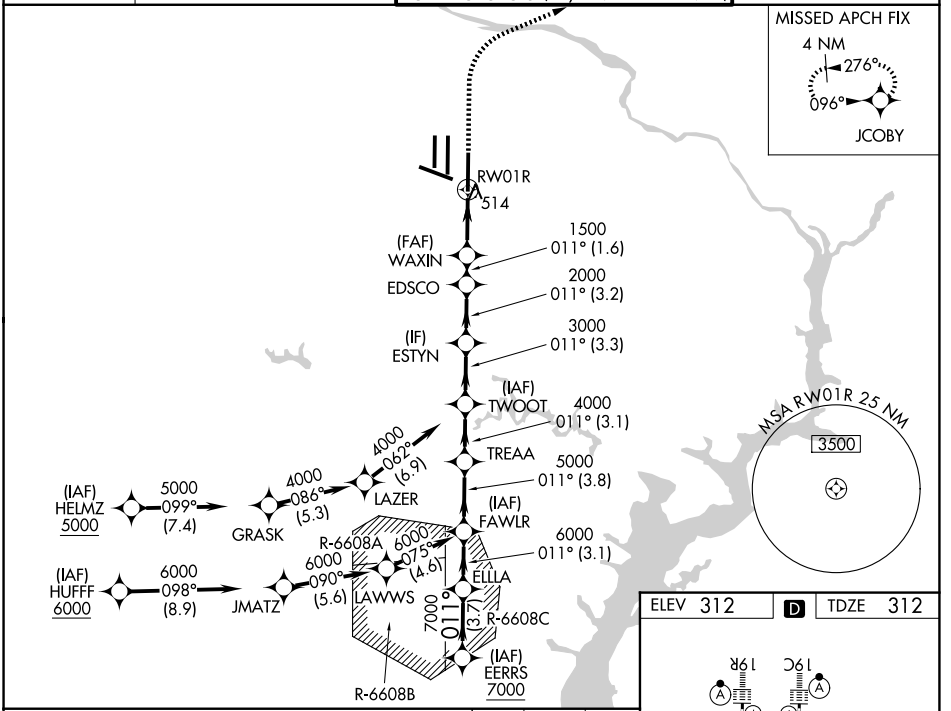

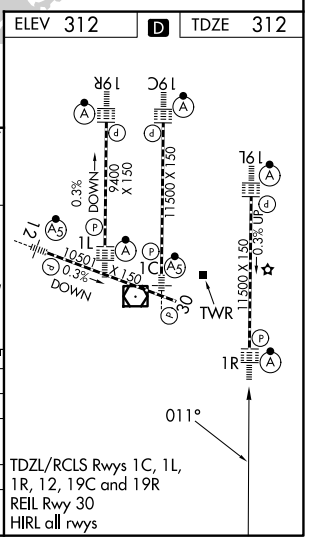

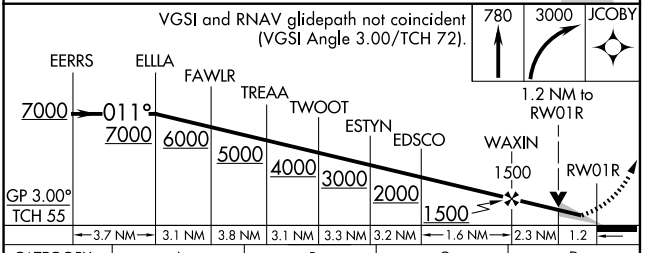

CATEGORY	A	B	C	D
LPV DA	512/18 200 (200-½)			
LNAV/VNAV DA	728/40 416 (500-¾)			
LNAV MDA	780/24 468 (500-½)		780/50 468 (500-1)	
CIRCLING	940-1 628 (700-1)		940-1¾ 628 (700-1¾)	1180-2¾ 868 (900-2¾)

NE-3, 29 OCT 2026 to 26 NOV 2026