WAAS CH 49105 W33A	APP CRS 328°	Rwy Ldg 5503 TDZE 705 Apt Elev 712

RNAV (GPS) RWY 33

AURORA MUNI (ARR)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1 SM.


MALSR

MISSED APPROACH: Climb to 3000 direct UCORO and hold, continue climb-in-hold to 3000.


ATIS	CHICAGO APP CON	AURORA TOWER★	GND CON
125.85	133.5 349.0	120.6 (CTAF) L	121.7

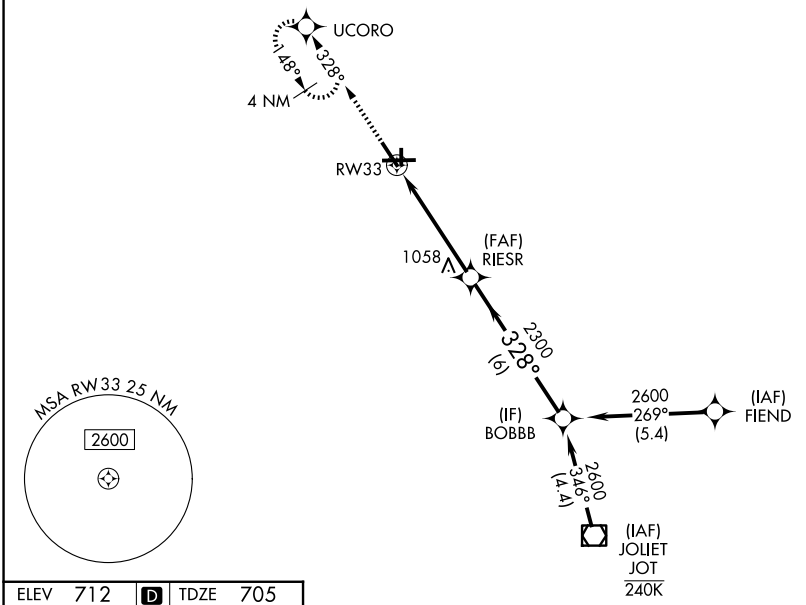

ELEV 712 D TDZE 705



HIRL Rwys 15-33 and 9-27 L
MIRL Rwy 18-36 L
REIL Rwys 15, 18, 27, and 36 L

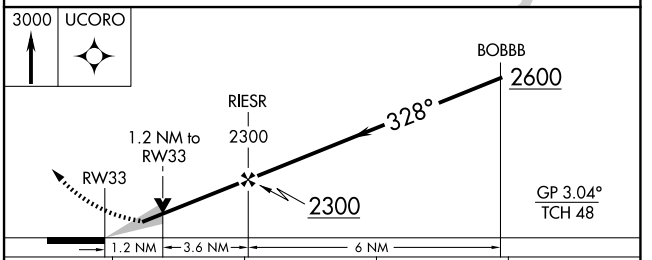

CATEGORY	A	B	C	D
LPV DA	1042-½ 337 (400-½)			
LNAV/VNAV DA	1140-¾ 435 (500-¾)			
LNAV MDA	1140-½ 435 (500-½)		1140-¾ 435 (500-¾)	
CIRCLING	1220-1 508 (600-1)		1300-1½ 588 (600-1½)	1340-2 628 (700-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026