RNAV (GPS) RWY 9

AURORA MUNI (ARR)

WAAS	APP CRS	Rwy Ldg	6501
CH 45522	090°	TDZE	707
W09A		Apt Elev	712


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM, LNAV Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2500 direct HOGIE and hold.


ATIS	CHICAGO APP CON	AURORA TOWER★	GND CON
125.85	133.5 349.0	120.6 (CTAF) L	121.7

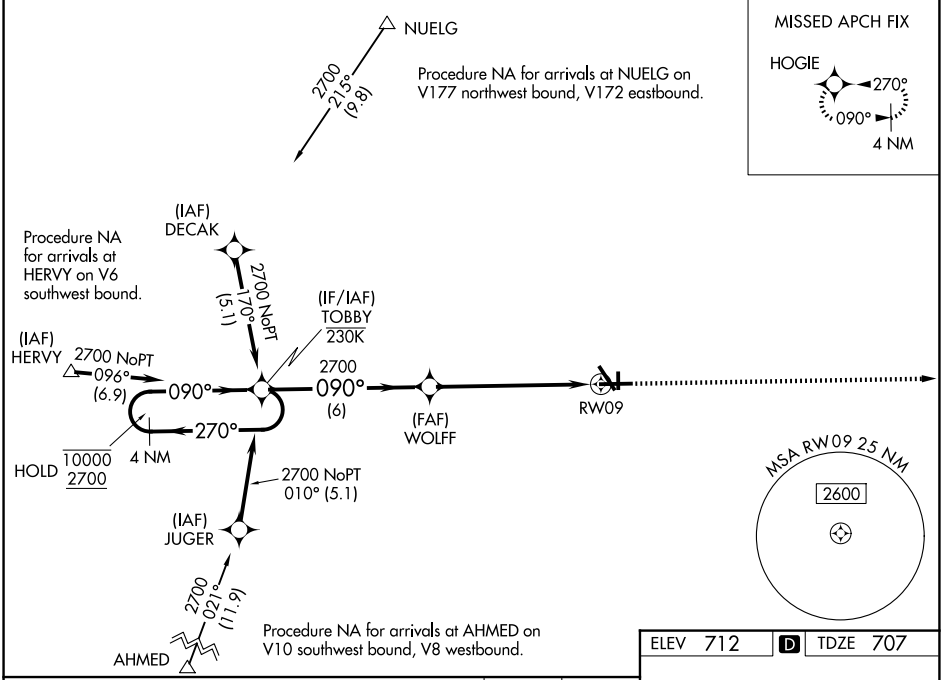

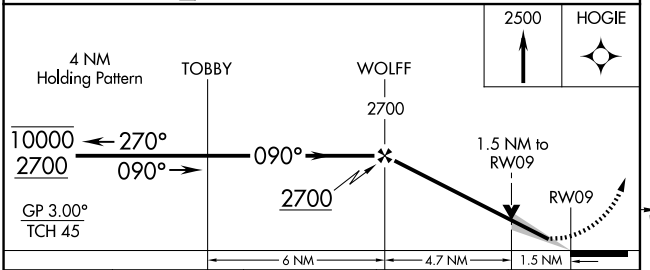

CATEGORY	A	B	C	D
LPV DA	957-½ 250 (300-½)			
LNAV/VNAV DA	1086-⅝ 379 (400-⅝)			
LNAV MDA	1220-½ 513 (600-½)		1220-1 513 (600-1)	
CIRCLING	1220-1 508 (600-1)		1300-1½ 588 (600-1½)	1340-2 628 (700-2)

ELEV 712 D TDZE 707



MIRL Rwy 18-36 L
HIRL Rwys 15-33 and 9-27 L
REIL Rwys 15, 18, 27, and 36 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026