RNAV (GPS) RWY 2L

DUPAGE (DPA)

WAAS CH 86830 W02B	APP CRS 015°	Rwy Ldg 7571 TDZE 754 Apt Elev 759


RNP APCH - GPS.


Circling Rwy 15, 28, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct HINCK and hold.


ATIS	CHICAGO APP CON	DUPAGE TOWER	GND CON
132.075	133.5 349.0	120.9 257.8	121.8

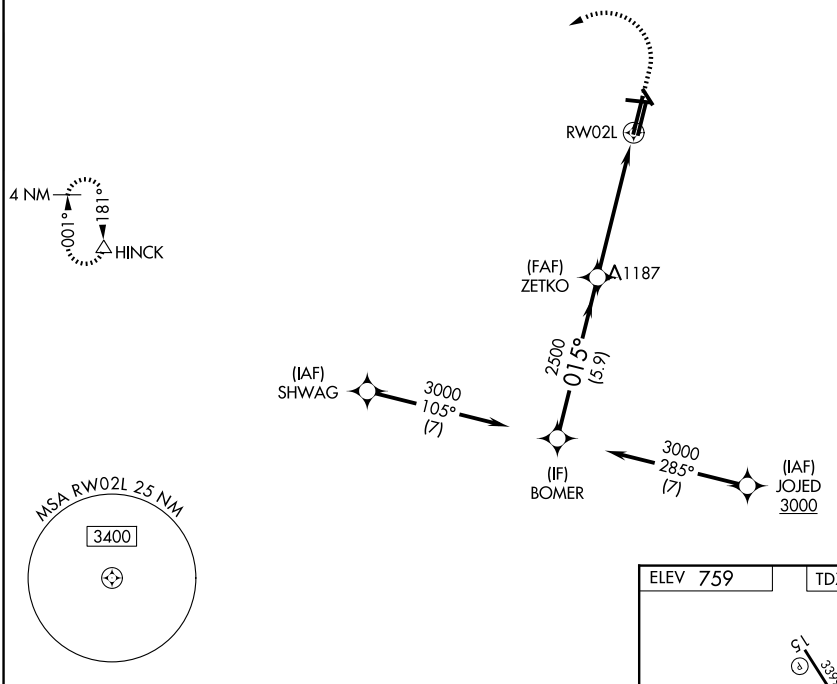

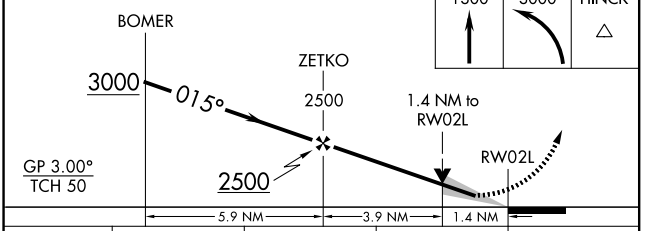

CATEGORY	A	B	C	D
LPV DA		954/18	200 (200-½)	
LNAV/VNAV DA		1214/45	460 (500-⅞)	
LNAV MDA	1260/24	506 (600-½)	1260/55	506 (600-1)
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2¼ 701 (800-2¼)

ELEV 759 TDZE 754

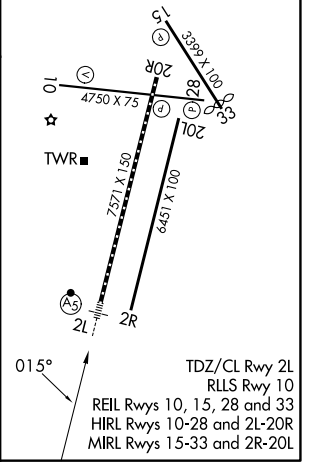

TDZ/CL Rwy 2L
RLLS Rwy 10
REIL Rwys 10, 15, 28 and 33
HIRL Rwys 10-28 and 2L-20R
MIRL Rwys 15-33 and 2R-20L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026