RNAV (GPS) RWY 2R


DUPAGE (DPA)

WAAS CH 45531 W02A	APP CRS 015°	Rwy Ldg 6451	TDZE 751	Apt Elev 759

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Aurora altimeter setting: increase LPV DA to 1038 feet, LNAV/VNAV DA to 1148 feet and visibility LNAV/VNAV all Cats ¼ SM; increase all MDA 40 feet and visibility LNAV Cat C/D visibility ⅛ SM and Circling Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Aurora altimeter setting. Circling Rwy 15, 28, 33 NA at night.


MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct NUELG and hold.

ATIS	CHICAGO APP CON	DUPAGE TOWER	GND CON
132.075	133.5 349.0	120.9 257.8	121.8

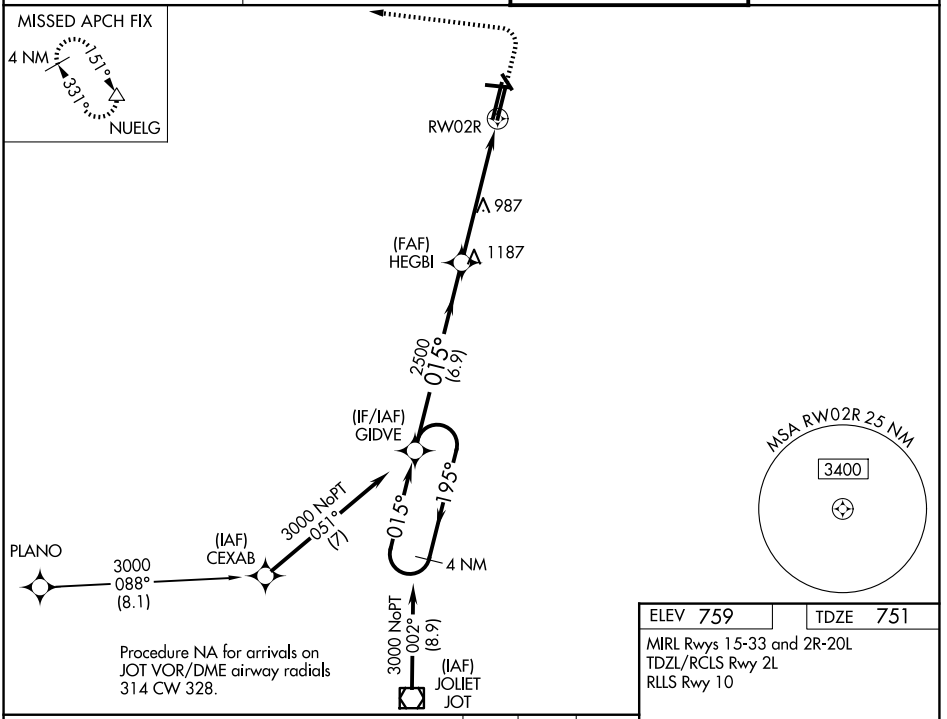


ELEV 759	TDZE 751

MIRL Rwys 15-33 and 2R-20L
TDZL/RCLS Rwy 2L
RLLS Rwy 10

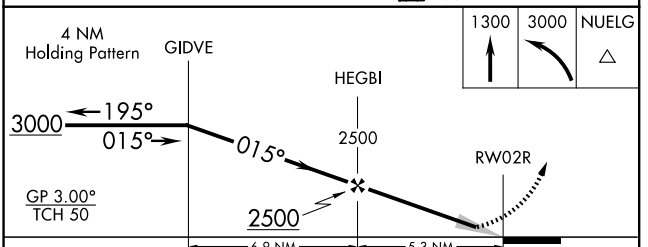

CATEGORY	A	B	C	D
LPV DA	1001-1	250 (300-1)		
LNAV/VNAV DA	1111-1⅛	360 (400-1⅛)		
LNAV MDA	1240-1	489 (500-1)	1240-1⅜	489 (500-1⅜)
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2¼ 701 (800-2¼)

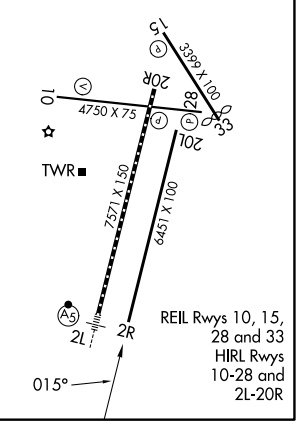

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026