RNAV (GPS) RWY 21

VERMILION RGNL (DNV)

WAAS CH 58004 W21A	APP CRS 210°	Rwy Ldg 6006 TDZE 697 Apt Elev 697


RNP APCH - GPS.


Circling NA to Rwys 12 and 30. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 1 SM, and LNAV Cats C/D visibility to 1⅛ SM.


MALSR

MISSED APPROACH: Climb to 2300 direct ATULE and hold.

AWOS-3	CHAMPAIGN APP CON ★	CLNC DEL	UNICOM
119.275	121.35 285.65	121.7	122.7 (CTAF) L

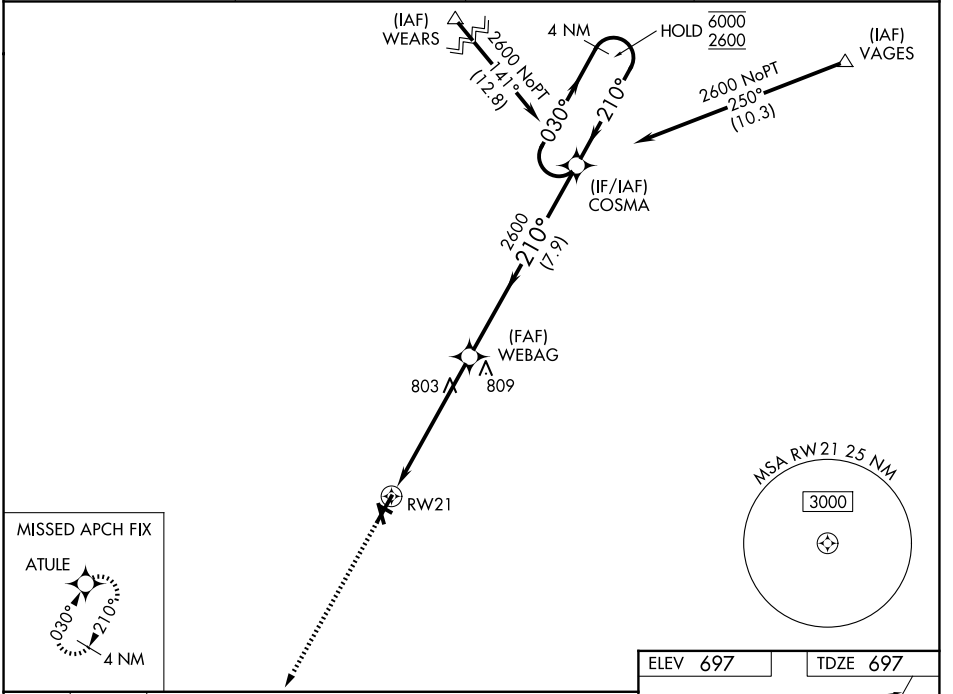

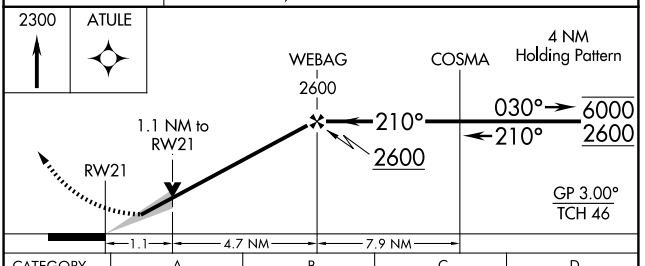

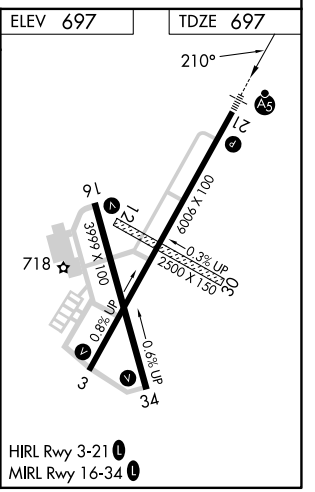

CATEGORY	A	B	C	D
LPV DA	990-½ 293 (300-½)			
LNAV/VNAV DA	1069-¾ 372 (400-¾)			
LNAV MDA	1080-½ 383 (400-½)		1080-⅝ 383 (400-⅝)	1080-1 383 (400-1)
CIRCLING	1160-1 463 (500-1)		1240-1½ 543 (600-1½)	1340-2 643 (700-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026