WAAS	APP CRS	Rwy Ldg	5264
CH 58304	005°	TDZE	759
W36A		Apt Elev	777


RNAV (GPS) RWY 36
AUBURN UNIVERSITY RGNL (AUO)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Columbus altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Columbus altimeter setting: increase LPV DA to 1072 feet and visibility all Cats ⅛ SM; increase LNAV/VNAV DA to 1173 feet and visibility all Cats ⅜ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¼ SM and Circling Cats C/D visibility ½ SM. For inop ALS, increase LNAV/VNAV Cat D visibility ¼ SM and LNAV Cat D visibility ⅛ SM. For inop ALS, when using Columbus altimeter setting, increase LPV all Cats visibility to 1⅛ SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV all Cats visibility to 1⅜ SM.

MALSF

MISSED APPROACH: Climb to 3000 direct RIVME and hold.

AWOS-3PT	ATLANTA APP CON ★	AUBURN TOWER ★	GND CON ★	UNICOM
132.575	125.5 323.1	123.875 (CTAF) L	121.625	123.0

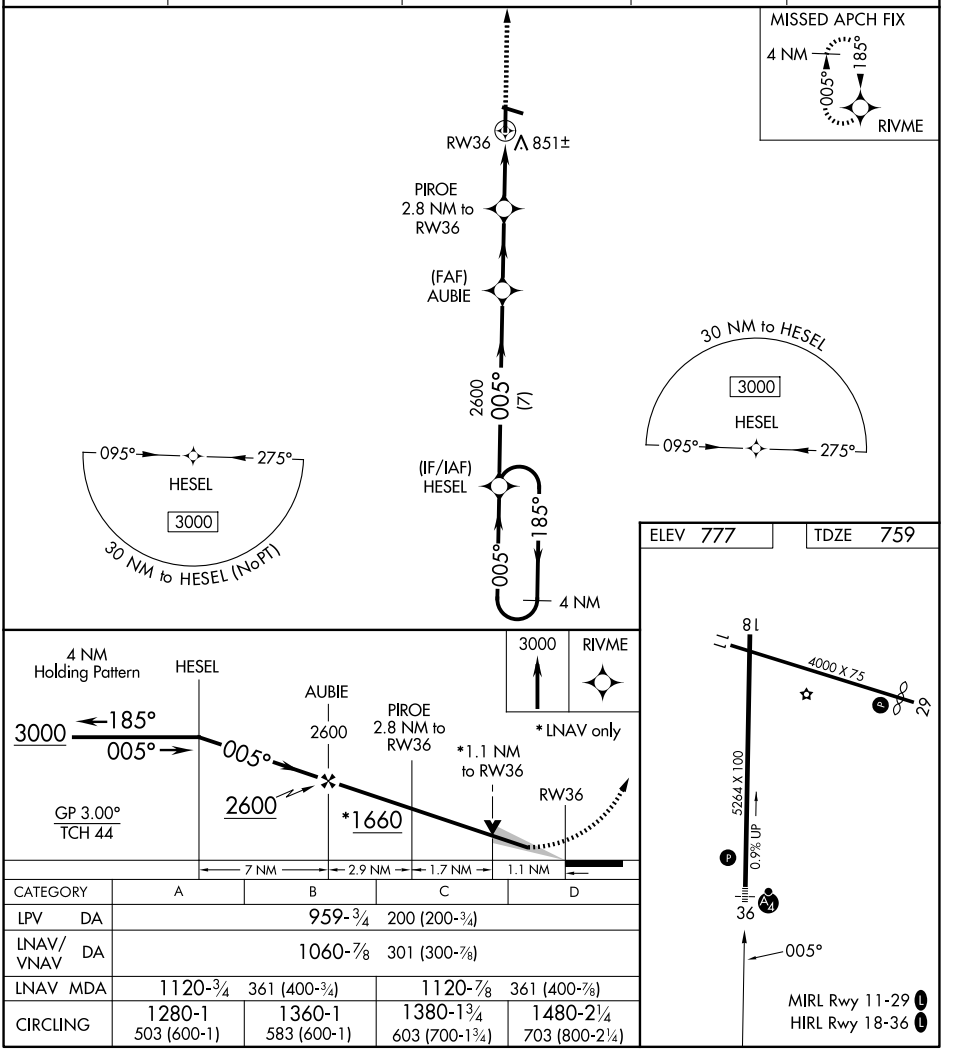

CATEGORY	A	B	C	D
LPV DA	959-¾	200 (200-¾)		
LNAV/VNAV DA	1060-⅞	301 (300-⅞)		
LNAV MDA	1120-¾	361 (400-¾)	1120-⅞	361 (400-⅞)
CIRCLING	1280-1	1360-1	1380-1¾	1480-2¼
	503 (600-1)	583 (600-1)	603 (700-1¾)	703 (800-2¼)

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026