ILS or LOC RWY 30

ANDERSON RGNL (AID)

LOC I-AID	APP CRS	Rwy Ldg	TDZE	Apt Elev
110.1	298°	5320	919	919


ADF required.
RADAR required for procedure entry.


T Rwy 30 helicopter visibility reduction below ¾ SM NA.
A For inop ALS, increase S-ILS 30 all Cats visibility to ⅞ SM.


MALSF

MISSED APPROACH: Climb to 2200 then climbing right turn to 2900 direct VIDEO LOM/RADAR and hold.

AWOS-3	INDIANAPOLIS APP CON	ANDERSON TOWER ★	GND CON	UNICOM
128.55	120.65 317.8	126.0 (CTAF) L	121.6	122.95

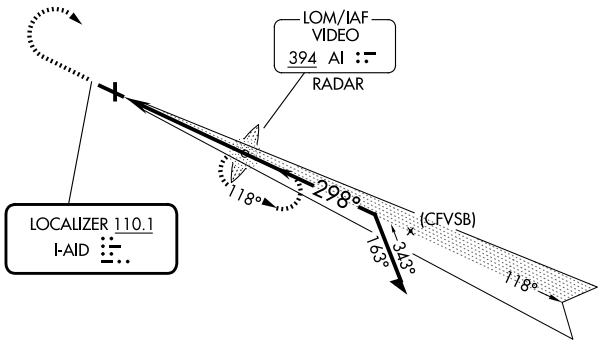




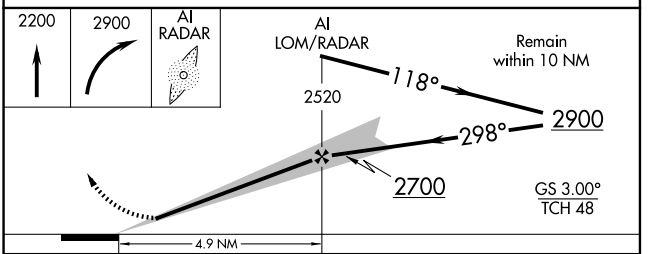

CATEGORY	A	B	C	D
S-ILS 30	1209-¾ 290 (300-¾)			
S-LOC 30	1440-¾ 521 (600-¾)		1440-1¼ 521 (600-1¼)	
CIRCLING	1440-1 521 (600-1)		1520-1¾ 601 (700-1¾)	1520-2 601 (700-2)

ELEV 919 TDZE 919



REIL Rwy 12
MIRL Rwys 12-30 and 18-36 L

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026