LOC I-ECC	APP CRS	Rwy Ldg	8653
110.1	200°	TDZE	5605
		Apt Elev	5622

ILS or LOC RWY 20

CEDAR CITY RGNL(CDC)

DME required.

T NA XOJPO fix minimums (Dual VOR receivers required): For inop ALS, increase S-LOC 20 Cats C/D visibility to 1⅜ SM. For inop ALS, increase S-LOC 20 Cats C/D visibility to 2½ SM.


#For inop ALS, increase S-ILS 20 visibility all Cats to 1 SM.


MALSR


MISSED APPROACH: Climb to 6200 then climbing right turn to 10000 on heading 322° and on EHK R-278 to BERYL INT/EHK 16.5 DME and hold, continue climb-in-hold to 10000.

†Missed approach requires minimum climb of 210 feet per NM to 7300.

ASOS	SALT LAKE CITY CENTER	UNICOM
119.025	125.575 379.275	123.0 (CTAF) L

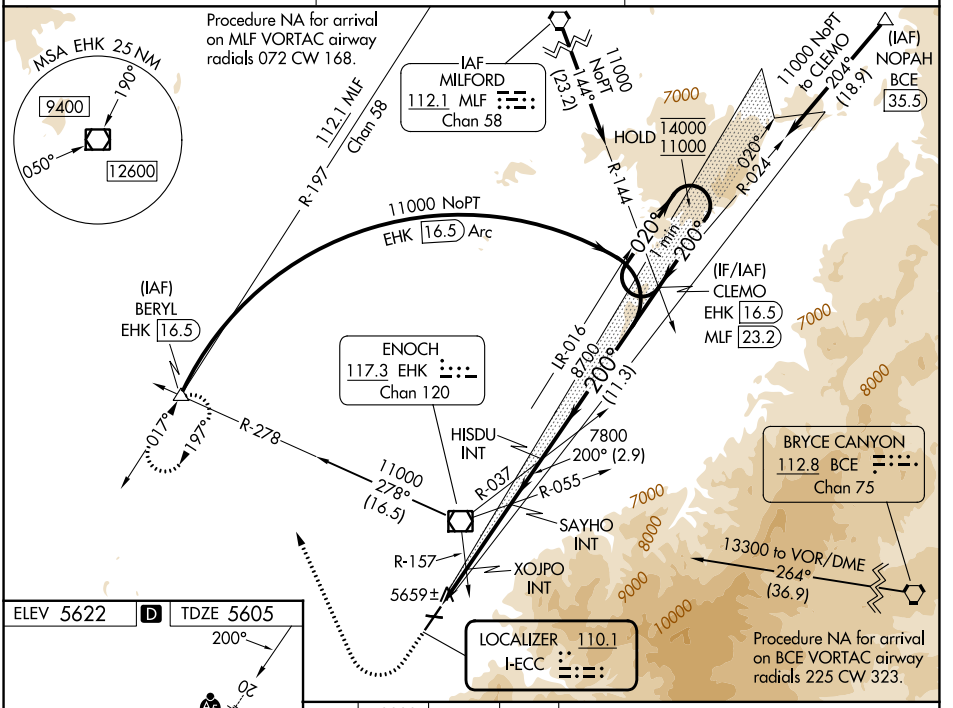

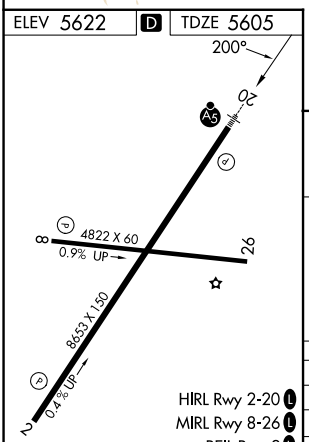

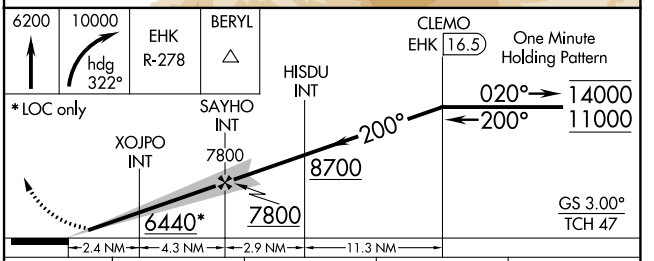

CATEGORY	A	B	C	D
S-ILS 20†	5825-½ 220 (300-½)			
S-ILS 20#	5882-½ 277 (300-½)			
S-LOC 20	6440-½ 835 (900-½)	6440-¾ 835 (900-¾)	6440-1⅞ 835 (900-1⅞)	
XOJPO FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED				
S-LOC 20	6100-½ 495 (500-½)		6100-1 495 (500-1)	

FAF to MAP 6.7 NM					
Knots	60	90	120	150	180
Min:Sec	6:42	4:28	3:21	2:41	2:14

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026