WAAS CH 50511 W28A	APP CRS 276°	Rwy Idg 6000 / TDZE 975 / Apt Elev 975


RNAV (GPS) RWY 28

LIMA ALLEN COUNTY (AOH)


Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). When local altimeter setting not received, use Findlay altimeter setting and increase LPV DA to 1255, LNAV/VNAV DA to 1477 and all MDAs 80 feet; increase LPV all Cats visibility ⅛ SM, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cats C/D ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Findlay altimeter setting.

MISSED APPROACH: Climb to 3000 direct UCAYU and hold.


ASOS	COLUMBUS APP CON	UNICOM
128.725	121.825 323.15	122.7 (CTAF) L

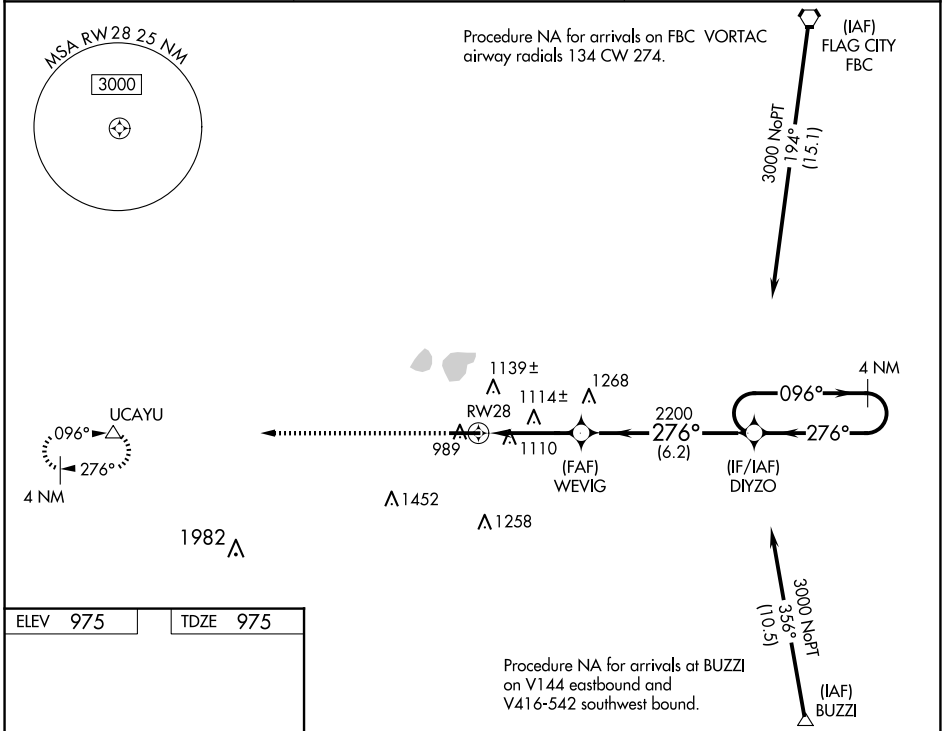

ELEV 975	TDZE 975



REIL Rwys 10 and 28 L
HIRL Rwy 10-28 L

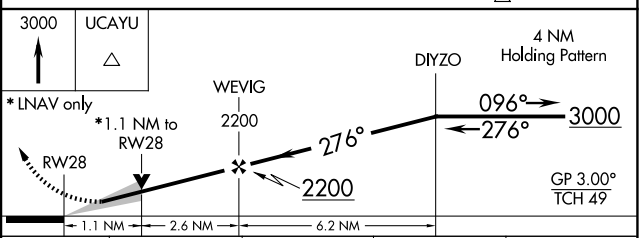

CATEGORY	A	B	C	D
LPV DA	1175-¾		200 (200-¾)	
LNAV/VNAV DA	1397-1⅜		422 (500-1⅜)	
LNAV MDA	1380-1	405 (500-1)	1380-1⅛	405 (500-1⅛)
CIRCLING	1420-1 445 (500-1)	1440-1 465 (500-1)	1540-1½ 565 (600-1½)	1820-2¾ 845 (900-2¾)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026