| VOR/DME SWO | APP CRS | Rwy Ldg 7401 |
|---|---|---|
| 108.4 | 356° | TDZE 966 |
| Chan 21 | | Apt Elev 1000 |


# VOR/DME RWY 35


STILLWATER RGNL (SWO)


When local altimeter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet; S-35 Cats C/D visibility ¼ mile; Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting.

MISSED APPROACH: Climb to 2600 direct SWO VOR/DME and hold.

| ASOS | KANSAS CITY CENTER | STILLWATER TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 135.725 | 127.8 319.1 | 125.35 (CTAF) L | 121.6 | 122.95 |

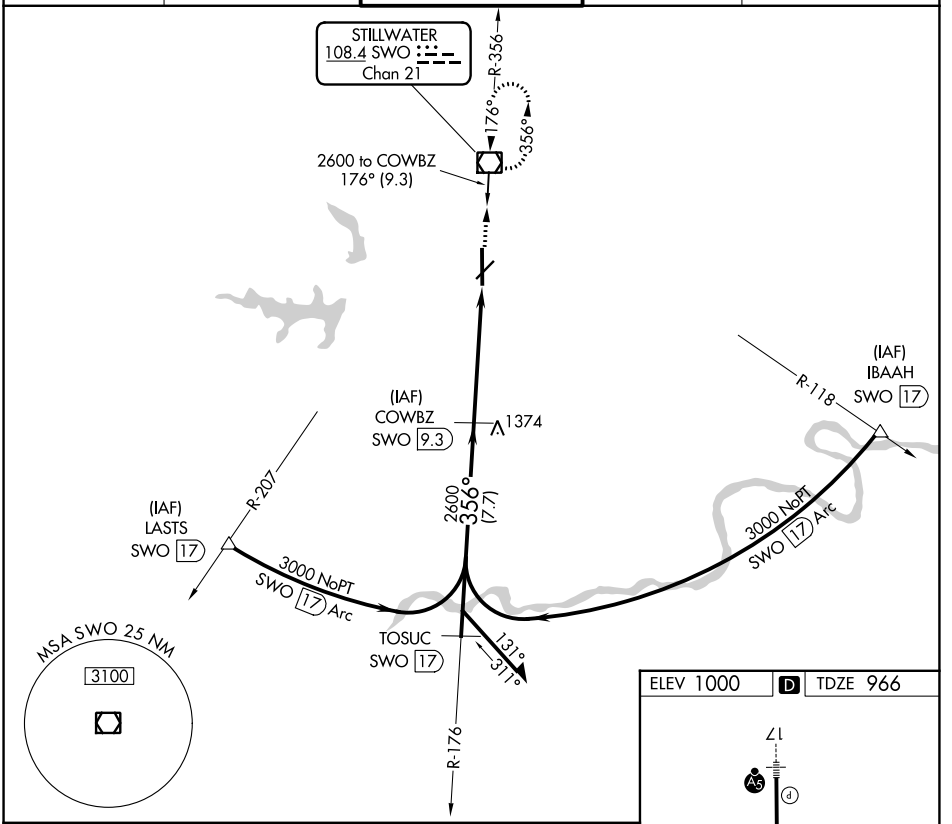

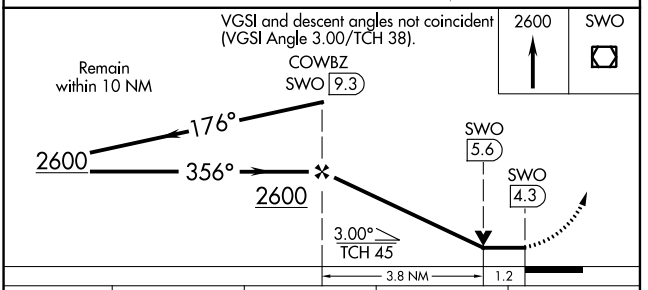
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-35 | 1380-1 414 (400-1) | | 1380-1¼ 414 (400-1¼) | |
| CIRCLING | 1420-1 420 (500-1) | 1460-1 460 (500-1) | 1520-1½ 520 (600-1½) | 1740-2¼ 740 (800-2¼) |

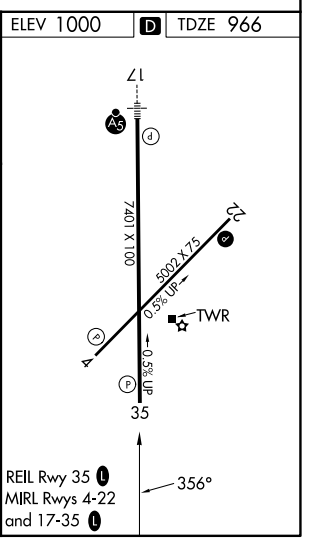

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026