WAAS CH **48911** **W13A** | APP CRS **128°** | Rwy Ldg **4500** TDZE **1885** Apt Elev **1915**


RNAV (GPS) RWY 13


POCONO MOUNTAINS RGNL (MPO)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18° C (0° F) or above 54° C (130° F).
Baro-VNAV and VDP NA when using Wilkes-Barre/Scranton altimeter setting. Rwy 13 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wilkes-Barre/Scranton altimeter setting: increase LPV DA to 2450 feet, LNAV/VNAV DA to 2537 feet and all visibilities ½ SM; increase all MDAs 180 feet and visibility LNAV Cat C/D ⅜ SM and Circling Cat C/D ½ SM. Circling Rwy 23 NA at night.


MISSED APPROACH: Climb to 3000 then climbing right turn to 4200 direct WHITT and hold.

ASOS	WILKES-BARRE APP CON	CLNC DEL	UNICOM
120.275	**126.3** **256.7**	**125.3**	**122.7** (CTAF) L

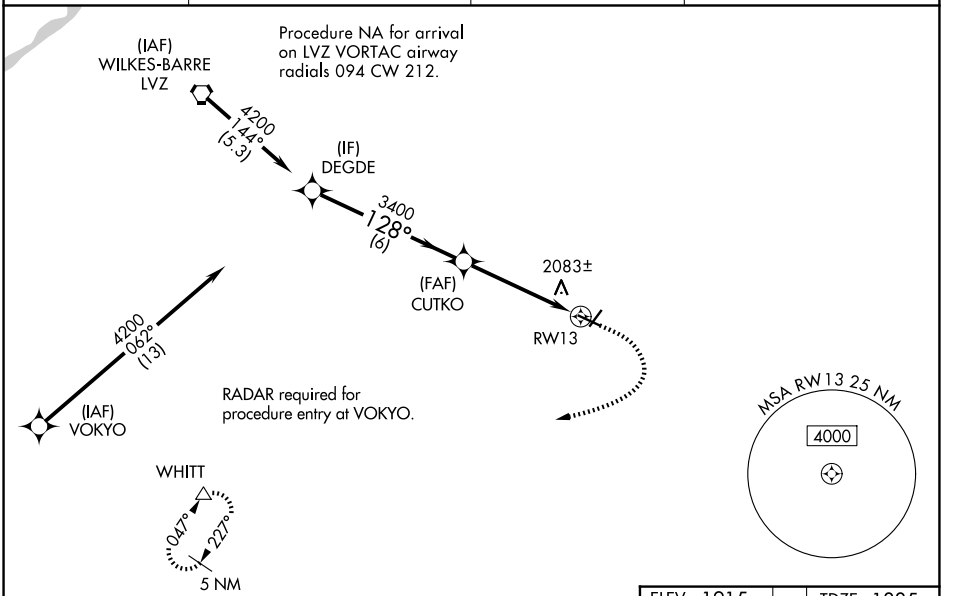

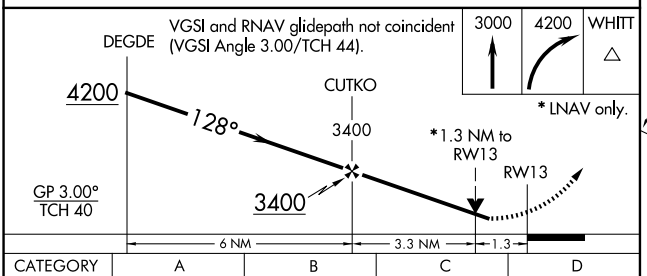

CATEGORY	A	B	C	D
LPV DA	2271-1¼ 386 (400-1¼)			
LNAV/VNAV DA	2358-1½ 473 (500-1½)			
LNAV MDA	2340-1 455 (500-1)		2340-1⅜ 455 (500-1⅜)	
CIRCLING	2420-1 505 (600-1)	2500-1 585 (600-1)	2600-2 685 (700-2)	2660-2½ 745 (800-2½)



REIL Rwys 5, 13, 23, and 31 L
MIRL Rwys 5-23 and 13-31 L

NE-4, 29 OCT 2026 to 26 NOV 2026