WAAS CH 50311 W05A | APP CRS 050° | Rwy Ldg 3999 | TDZE 1906 | Apt Elev 1915


RNAV (GPS) RWY 5


POCONO MOUNTAINS RGNL (MPO)

Baro-VNAV NA when using Wilkes-Barre/Scranton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Rwy 5 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Wilkes-Barre/Scranton altimeter setting: increase LPV DA to 2339 feet, LNAV/VNAV DA to 2431 feet and all visibilities ¼ SM; increase all MDAs 180 feet and visibility Cat C and D ½ SM. Circling Rwy 23 NA at night.


MISSED APPROACH: Climb to 4000 direct ZEGAS and left turn via 292° track to LVZ VORTAC and hold.

ASOS	WILKES-BARRE APP CON	CLNC DEL	UNICOM
120.275	126.3 256.7	125.3	122.7 (CTAF) L

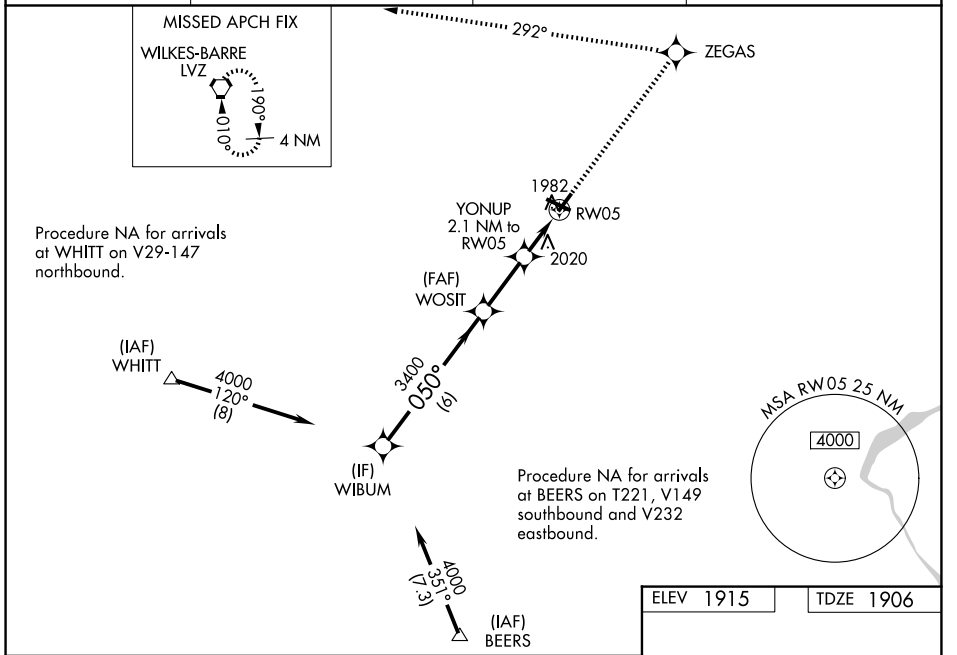

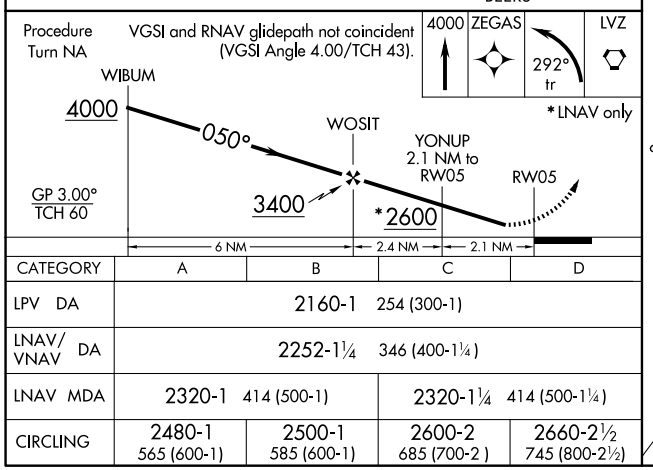

CATEGORY	A	B	C	D
LPV DA	2160-1 254 (300-1)			
LNAV/VNAV DA	2252-1¼ 346 (400-1¼)			
LNAV MDA	2320-1 414 (500-1)		2320-1¼ 414 (500-1¼)	
CIRCLING	2480-1 565 (600-1)	2500-1 585 (600-1)	2600-2 685 (700-2)	2660-2½ 745 (800-2½)

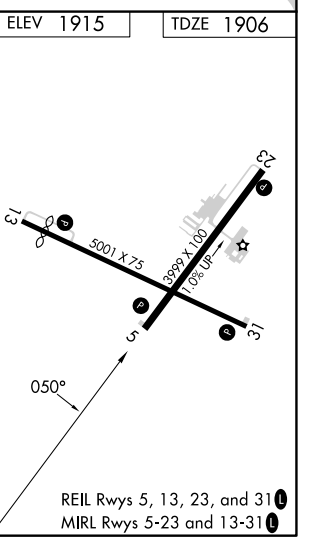

NE-4, 29 OCT 2026 to 26 NOV 2026
NE-4, 29 OCT 2026 to 26 NOV 2026