# RNAV (GPS) RWY 17

BRUCE CAMPBELL FLD (MBO)


| WAAS CH 69231 W17A | APP CRS 174° | Rwy Ldg 4444 / TDZE 325 / Apt Elev 325 |
|---|---|---|


RNP APCH.

Baro-VNAV and VDP NA when using Jackson-Medgar Wiley Evers Intl altimter setting. Rwy 17 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 21 feet and all MDA 40 feet, and increase LNAV/VNAV visibility ⅛ SM, and Circling Cats C/D visibility ¼ mile.


MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct DUHAB and hold.

| AWOS-3PT | JACKSON APP CON ★ | CLNC DEL | UNICOM |
|---|---|---|---|
| 119.125 | 123.9 317.7 | 125.9 | 122.8 (CTAF) L |

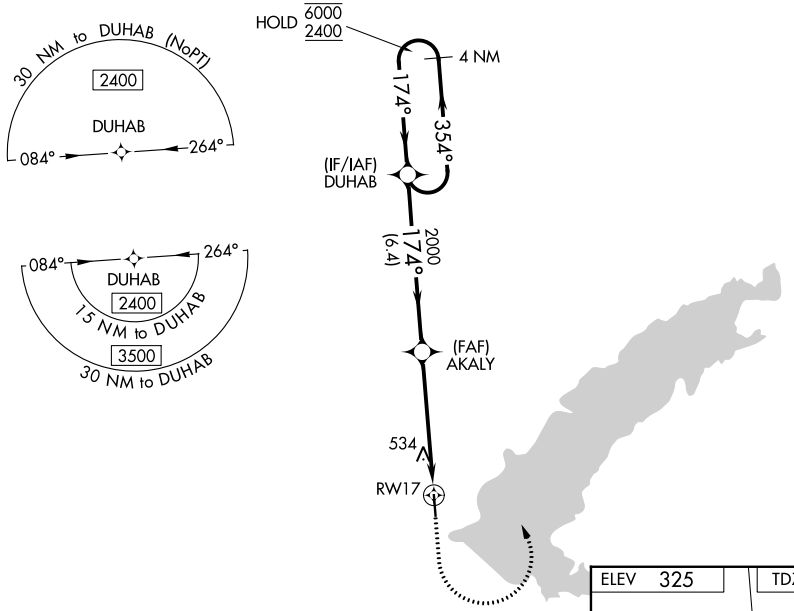

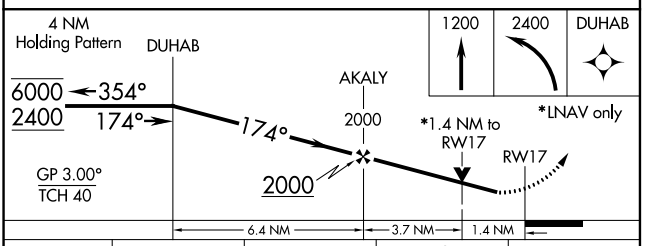
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 600-⅞ 275 (300-⅞) | | | |
| LNAV/VNAV DA | 832-1⅜ 507 (600-1⅜) | | | |
| LNAV MDA | 800-1 475 (500-1) | | 800-1⅜ 475 (500-1⅜) | |
| CIRCLING | 820-1 495 (500-1) | 840-1 515 (600-1) | 1040-2 715 (800-2) | 1040-2¼ 715 (800-2¼) |



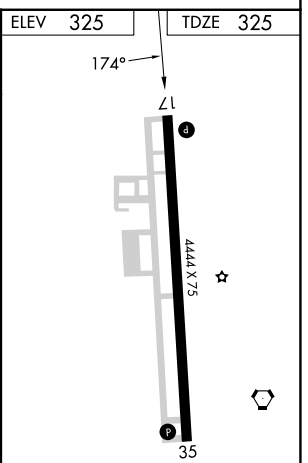


SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026