WAAS CH **50440** **W33A**	APP CRS **325°**	Rwy Ldg **5001** TDZE **41** Apt Elev **47**

RNAV (GPS) RWY 33R


WRIGHT AAF (FORT STEWART)/MIDCOAST RGNL (LHW)

RNP APCH.


Circling to Rwy 6R, 24L, 15R, 33L, 6L, 24R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Savannah/Hilton Head Intl altimeter setting: increase LPV DA to 346 feet, LNAV/VNAV DA to 379 feet and all visibilities ⅛ mile; increase all MDAs 60 feet and LNAV and Circling Cats C and D visibility ¼ mile. Baro-VNAV NA when using Savannah Hilton Head Intl altimeter. Circling NA northeast of Rwy 15L-33R. Procedure NA when R-3005C/D or R-3007C is active and LHW Tower is closed.

MISSED APPROACH: Climb to 500 then climbing right turn to 4000 direct HARPS and hold.

ATIS	SAVANNAH APP CON★	WRIGHT TOWER★	GND CON
118.475	**120.4 353.775**	**126.25** (CTAF) Ⓛ **269.275**	**121.7 273.575**

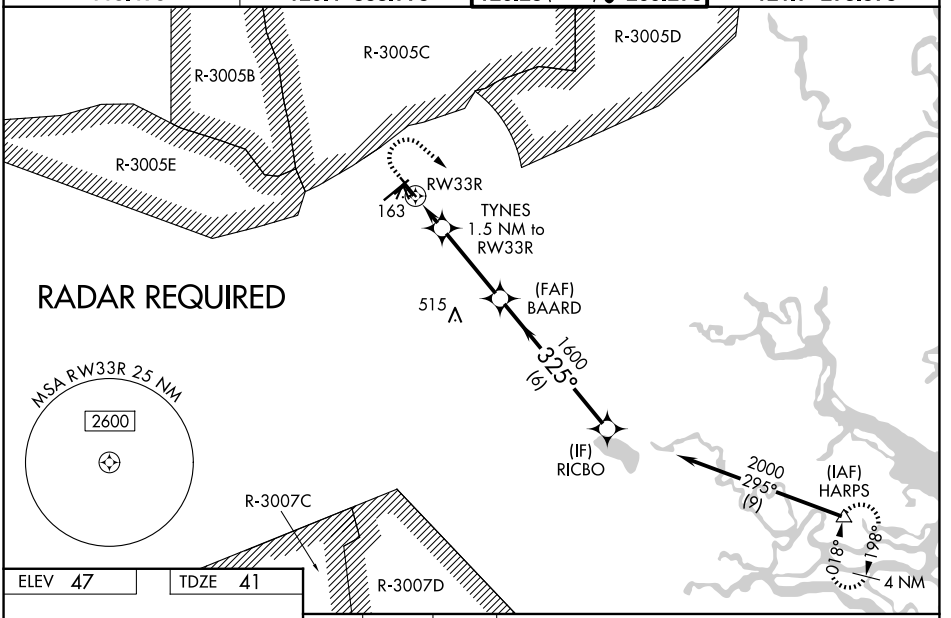


ELEV 47 TDZE 41



500 4000 HARPS

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 65).

*LNAV only.

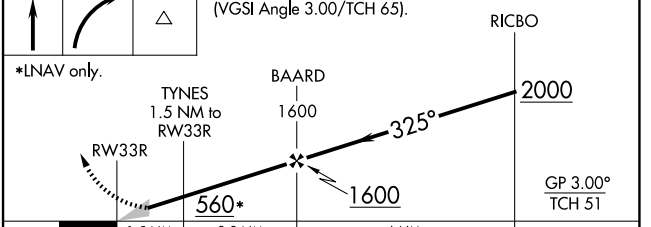

CATEGORY	A	B	C	D
LPV DA		291-1	250 (300-1)	
LNAV/VNAV DA		324-1	283 (300-1)	
LNAV MDA		420-1	379 (400-1)	
CIRCLING	560-1 513 (600-1)	620-1 573 (600-1)	680-1¾ 633 (700-1¾)	680-2 633 (700-2)

HIRL Rwys 6L-24R, 15L-33R Ⓛ

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026