WAAS	APP CRS	Rwy Ldg	7002
CH 93636	133°	TDZE	1391
W13A		Apt Elev	1391

RNAV (GPS) RWY 13

BEMIDJI RGNL (BJI)


RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS increase LNAV/VNAV visibility all Cats to ⅞ SM, increase LNAV Cats A and B visibility to 1 SM and Cats C and D visibility to 1⅛ SM.


MALSR

MISSED APPROACH: Climb to 3200 direct OMIGY and hold.


AWOS-3	MINNEAPOLIS CENTER	UNICOM
119.275	134.75 251.1	122.8 (CTAF) L

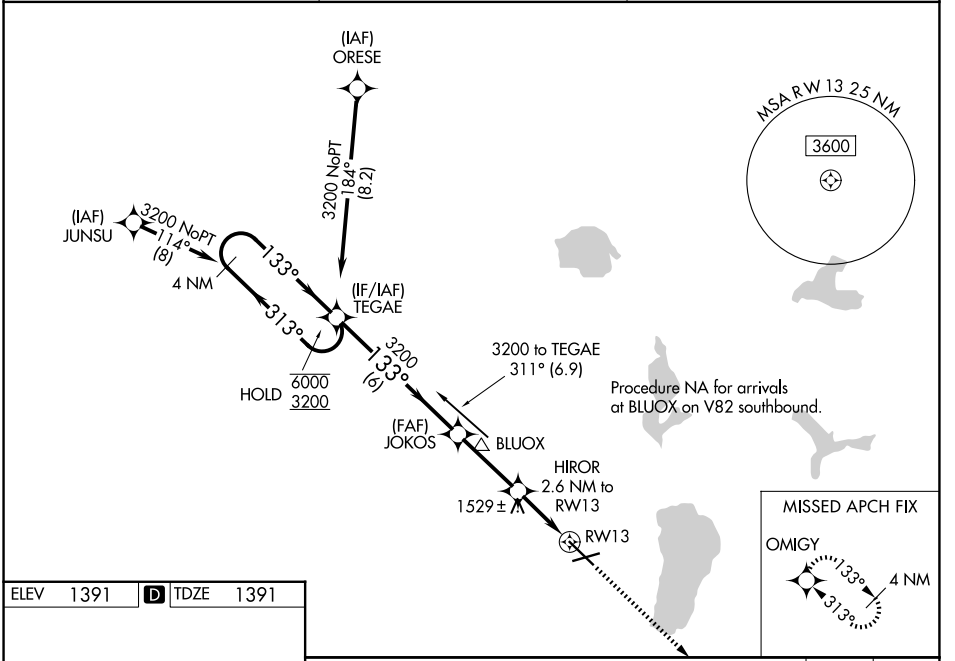

ELEV 1391 D TDZE 1391



HIRL Rwy 13-31 L
MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

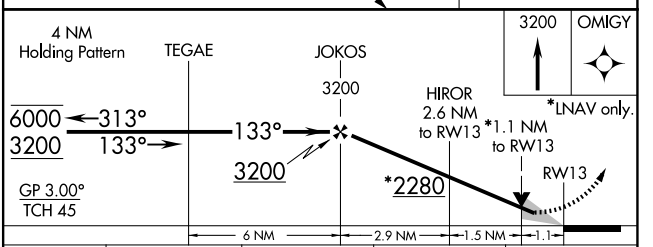

CATEGORY	A	B	C	D
LPV DA	1648-¾	257 (300-¾)		
LNAV/VNAV DA	1680-¾	289 (300-¾)		
LNAV MDA	1780-¾	389 (400-¾)		
CIRCLING	1840-1 449 (500-1)	1860-1 469 (500-1)	1860-1½ 469 (500-1½)	1960-2 569 (600-2)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026