WAAS	APP CRS	Rwy Ldg	8099
CH 77507	294°	TDZE	531
W29A		Apt Elev	544

RNAV (GPS) RWY 29
ST LOUIS RGNL (ALN)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM and LNAV Cat C/D visibility to 1 SM.


MALSR


MISSED APPROACH: Climb to 2400 direct SQUAR and hold.

ATIS	ST LOUIS APP CON	REGIONAL TOWER★	GND CON	UNICOM
128.0	124.2 353.9	126.0 (CTAF) L 239.0	120.2	122.95

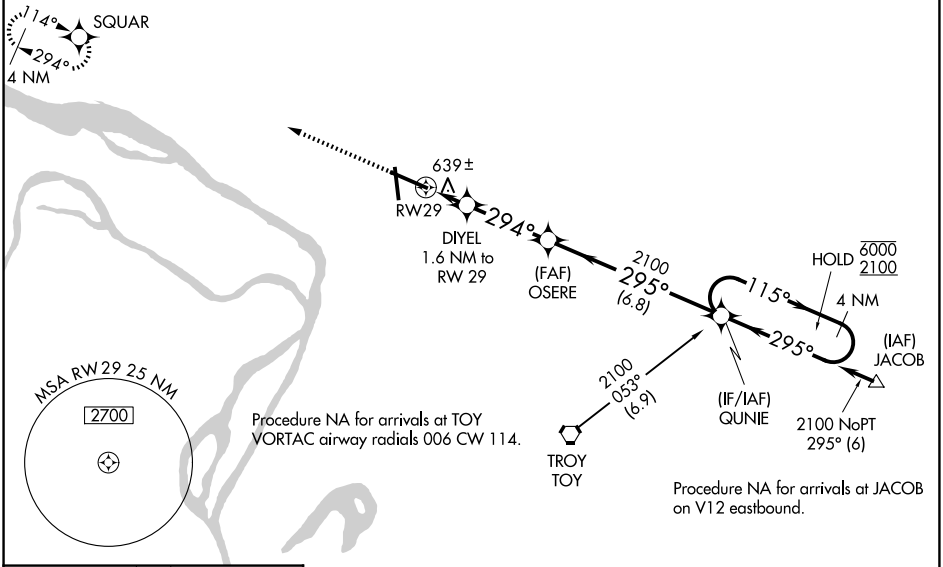

ELEV 544 D TDZE 531



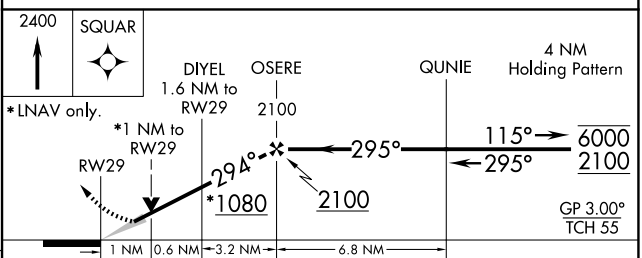

CATEGORY	A	B	C	D
LPV DA	731-½	200 (200-½)		
LNAV/VNAV DA	825-½	294 (300-½)		
LNAV MDA	900-½	369 (400-½)	900-¾	369 (400-¾)
CIRCLING	1000-1	456 (500-1)	1160-1¾ 616 (700-1¾)	1200-2 656 (700-2)

REIL Rwy 11 L
HIRL Rwy 11-29 L
MIRL Rwy 17-35 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026