RNAV (GPS) RWY 35

ST LOUIS RGNL (ALN)


APP CRS	Rwy Ldg	6500
354°	TDZE	544
	Apt Elev	544

RNP APCH.


Visibility reduction by helicopters NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 60 feet, increase LNAV Cat C/ D visibility ⅛ SM and Circling Cat C/D visibility ¼ SM. When VGSI inop, straight-in/Circling Rwy 35 procedure and Circling Rwy 17 NA at night.


MISSED APPROACH: Climb to 2200 direct JETIK and hold.

ATIS	ST LOUIS APP CON	REGIONAL TOWER*	GND CON	UNICOM
128.0	124.2 353.9	126.0 (CTAF) L 239.0	120.2	122.95

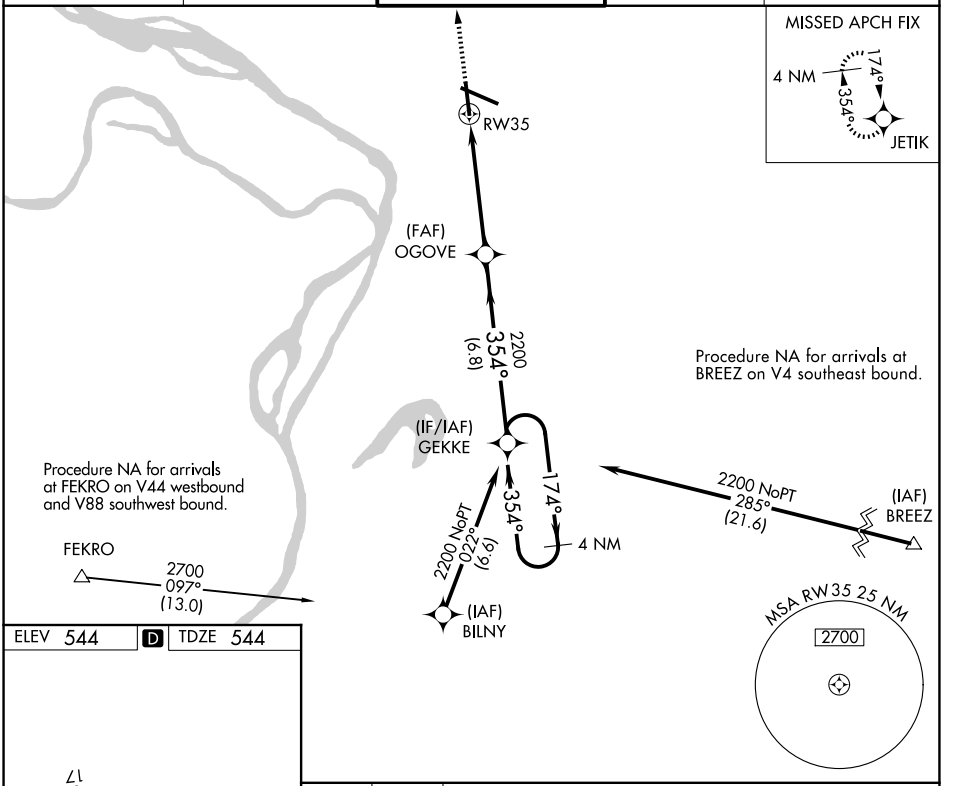

ELEV 544 D TDZE 544

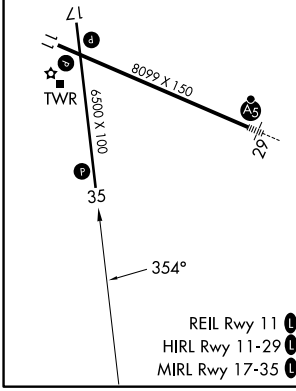

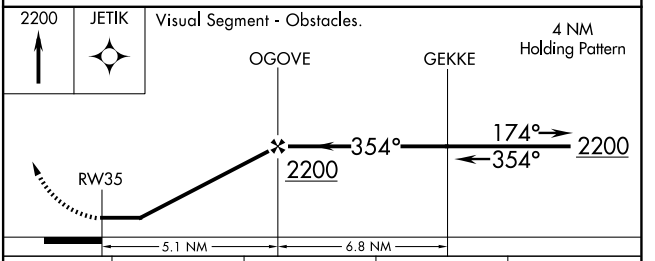

CATEGORY	A	B	C	D
LNAV MDA	1020-1 476 (500-1)		1020-1⅜ 476 (500-1⅜)	
CIRCLING	1020-1 476 (500-1)		1160-1¾ 616 (700-1¾)	1200-2 656 (600-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026