WAAS	APP CRS	Rwy Ldg	4461
CH 56425	294°	TDZE	97
W29A		Apt Elev	103

RNAV (GPS) RWY 29R


ZAMPERINI FLD (TOA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C (38°F) or above 54°C (130°F). Circling NA southwest of Rwy 11R-29L. DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to ⅞ SM. For inop ALS when using Los Angeles Intl altimeter setting, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 2 SM, and LNAV Cat C visibility to 1¾ SM. Baro-VNAV and VDP NA when using Los Angeles Intl altimeter setting. When local altimeter setting not received, except for operators with approved weather reporting service, use Los Angeles Intl setting: increase LPV DA to 391 feet and LNAV/VNAV DA to 763 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility and LNAV Cat C visibility ⅛ SM.


MALSR

MISSED APPROACH: (Do not exceed 185 KIAS until ZANAN) Climb to 3000 direct ZANAN and on track 221° to INISH and hold, continue climb-in-hold to 3000.

ATIS	SOCAL APP CON	TORRANCE TOWER★	GND CON	UNICOM
125.6	124.3 363.2 (11L, 11R) 127.2 269.6 (29L, 29R)	133.075 257.8 (N) 124.0 (CTAF) L 257.8 (S)	120.9	122.95

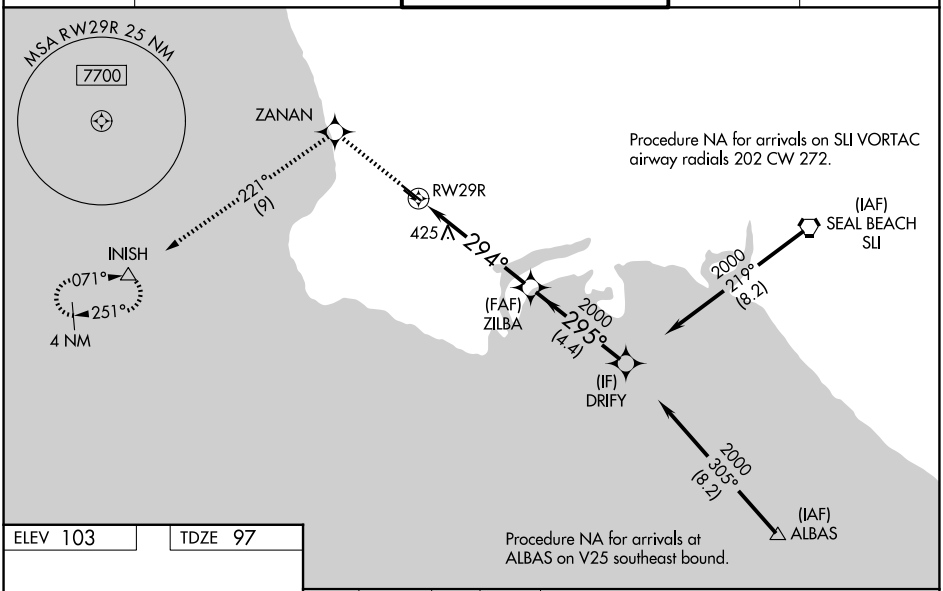


ELEV 103 TDZE 97



REIL Rwy 29L
MIRL Rwys 11L-29R and 11R-29L

3000	ZANAN	tr 221°	INISH

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 11).

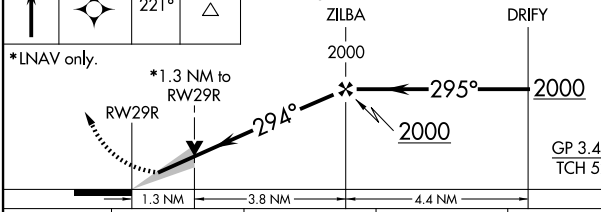

CATEGORY	A	B	C	D
LPV DA	367-½ 270 (300-½)			NA
LNAV/VNAV DA	739-1½ 642 (700-1½)			NA
LNAV MDA	680-½ 583 (600-½)		680-1¼ 583 (600-1¼)	NA
CIRCLING	680-1 577 (600-1)		680-1¾ 577 (600-1¾)	NA

SW-3, 29 OCT 2026 to 26 NOV 2026
SW-3, 29 OCT 2026 to 26 NOV 2026