RNAV (GPS) RWY 5


BRAINERD LAKES RGNL (BRD)


WAAS CH 82018 W05A	APP CRS 050°	Rwy Ldg 6512 TDZE 1224 Apt Elev 1232

Baro-VNAV NA when using Aitkin altimeter setting. DME/DME RNP-0.3 NA. Procedure NA when R-4301 is active. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Aitkin altimeter setting and increase all DA 52 feet and all MDA 60 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats, and LNAV Cats C and D visibility ¼ mile. VDP NA with Aitkin altimeter setting.


MISSED APPROACH: Climb to 3000 direct EYUPO and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
126.775	118.05 239.0	122.7 (CTAF) L

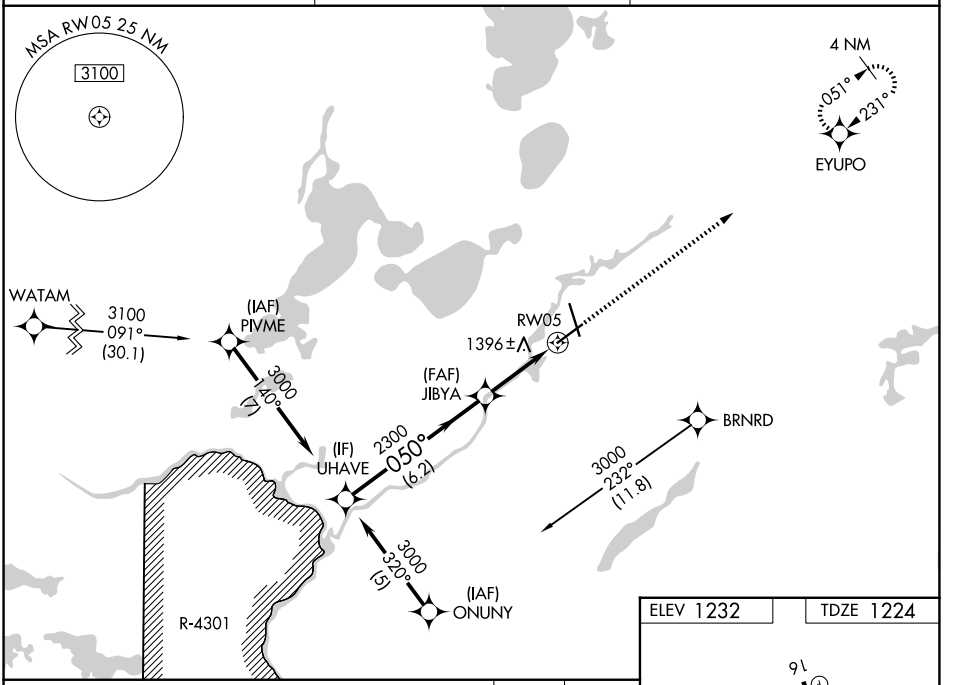

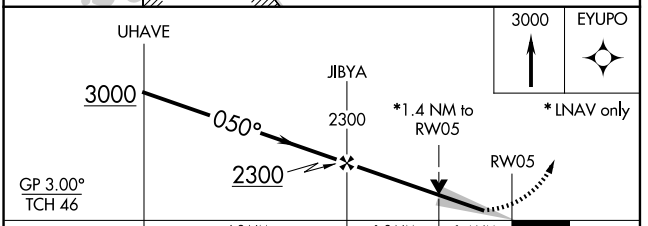

CATEGORY	A	B	C	D
LPV DA	1424-¾ 200 (200-¾)			
LNAV/VNAV DA	1777-2 553 (600-2)			
LNAV MDA	1700-1 476 (500-1)		1700-1⅜ 476 (500-1⅜)	1700-1½ 476 (500-1½)
CIRCLING	1760-1 528 (600-1)		1760-1½ 528 (600-1½)	1860-2 628 (700-2)

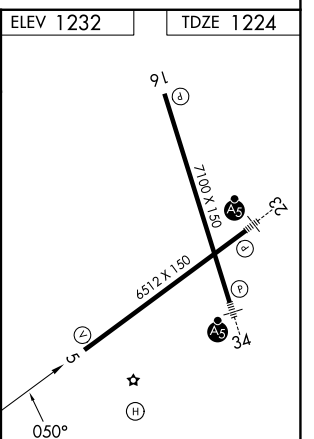

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026