LOC I-DVS	APP CRS	Rwy Ldg	8501
111.9	357°	TDZE	790
		Apt Elev	794

ILS or LOC RWY 35

GERALD R FORD INTL (GRR)


DME required. RADAR or DME required for procedure entry.

HONSE fix minimums: for inop ALS, increase S-LOC 35 Cat C/D visibility to RVR 6000.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 on VIO VOR/DME R-353 to WALKS/VIO VOR/DME 13.7 DME and hold, continue climb-in-hold.

ATIS	GREAT LAKES APP CON★	GRAND RAPIDS TOWER★	GND CON	UNICOM
118.725	128.4 257.6	135.65 (CTAF) L 339.8	121.8	122.95

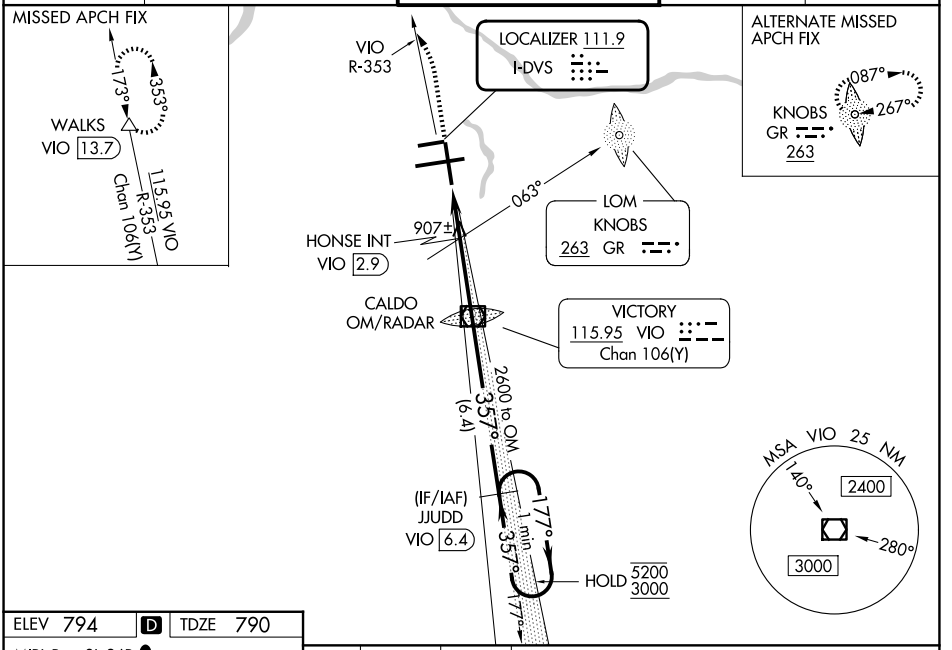


ELEV 794	D	TDZE 790

MIRL Rwy 8L-26R L
REIL Rwys 8L, 17 and 26R L
HIRL Rwys 8R-26L and 17-35 L



FAF to MAP 4.9 NM					
Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

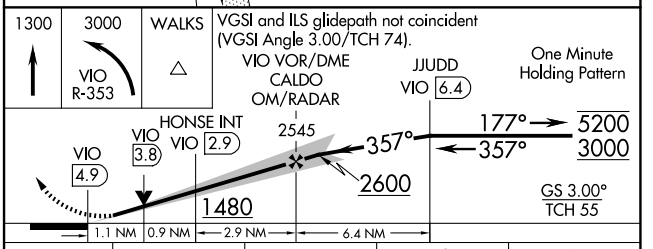

CATEGORY	A	B	C	D
S-ILS 35 *	990/24	200 (200-½)		
S-LOC 35	1480/24	690 (700-½)	1480-1½	690 (700-1½)
CIRCLING	1480-1	686 (700-1)	1480-2 686 (700-2)	1480-2¼ 686 (700-2¼)
HONSE MINIMUMS (ADF OR DME REQUIRED)				
S-LOC 35	1200/24	410 (500-½)	1200/40	410 (500-¾)
CIRCLING	1260-1	466 (500-1)	1380-1½ 586 (600-1½)	1380-2 586 (600-2)

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026