RNAV (GPS) RWY 35

GERALD R FORD INTL (GRR)


WAAS	APP CRS	Rwy Ldg	8501
CH 87112	357°	TDZE	790
W35A		Apt Elev	794

RNP APCH - GPS.
RADAR required for procedure entry.
T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000.
* RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR


MISSED APPROACH: Climb to 3000 direct HABKO and on track 352° to CLOCK and hold.

ATIS	GREAT LAKES APP CON★	GRAND RAPIDS TOWER★	GND CON	UNICOM
118.725	128.4 257.6	135.65 (CTAF) L 339.8	121.8	122.95

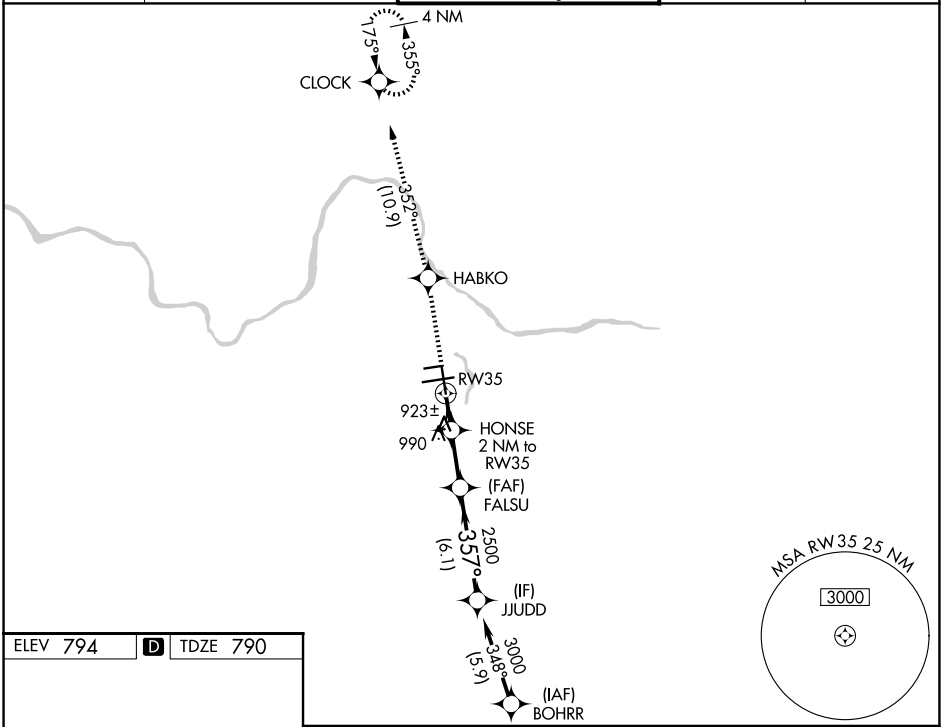

ELEV 794 D TDZ 790

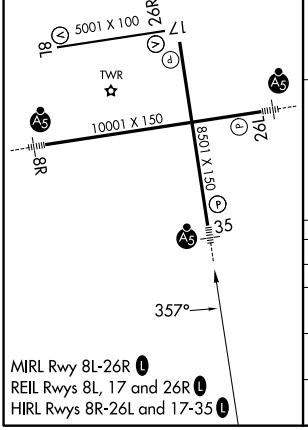

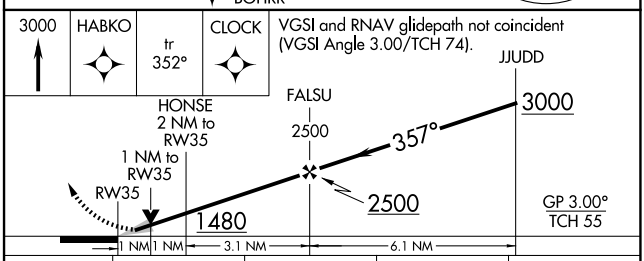

CATEGORY	A	B	C	D
LPV DA*	990/24 200 (200-½)			
LNAV/VNAV DA	1236/50 446 (500-1)			
LNAV MDA	1180/24 390 (400-½)		1180/35 390 (400-⅝)	1180/50 390 (400-1)
CIRCLING	1260-1 466 (500-1)		1340-1½ 546 (600-1½)	1360-2 566 (600-2)

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026