RNAV (GPS) RWY 8R

GERALD R FORD INTL (GRR)

WAAS CH **40113** **W08B**	APP CRS **087°**	Rwy Ldg **10001** TDZE **794** Apt Elev **794**


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000, LNAV Cat C/D visibility to RVR 6000.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2700 direct CAVUS and on track 085° to SARAN and hold.


ATIS	GREAT LAKES APP CON★	GRAND RAPIDS TOWER★	GND CON	UNICOM
118.725	128.4 257.6	135.65 (CTAF) L 339.8	121.8	122.95

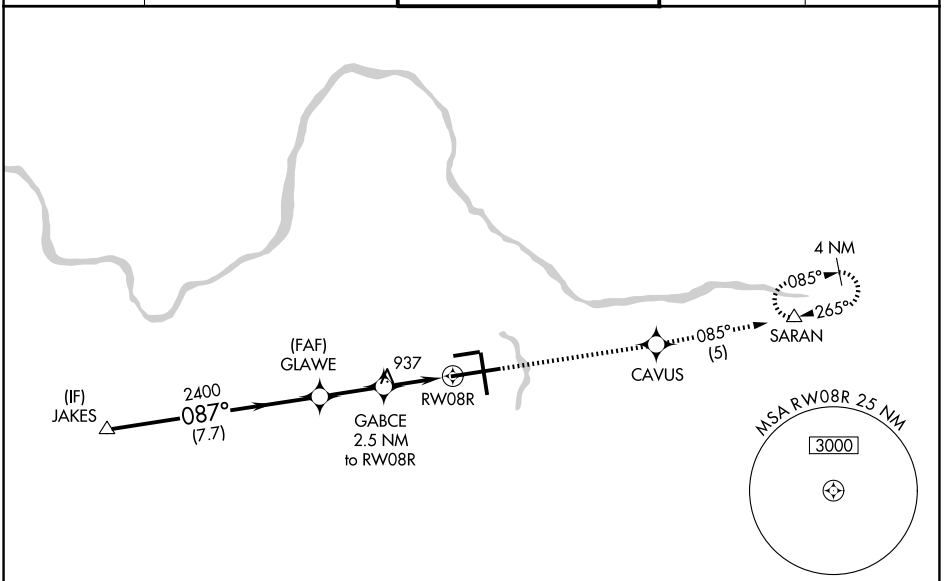

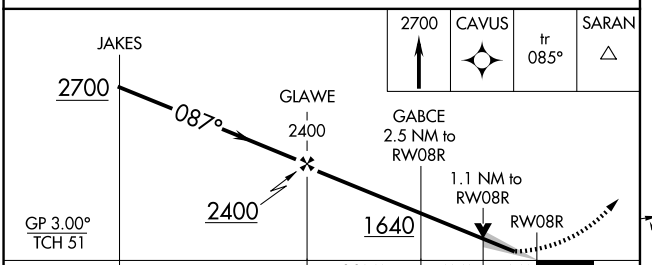

CATEGORY	A	B	C	D
LPV DA*	994/24 200 (200-½)			
LNAV/VNAV DA	1200/40 406 (500-¾)			
LNAV MDA	1200/24 406 (500-½)		1200/40 406 (500-¾)	
CIRCLING	1260-1 466 (500-1)		1340-1½ 546 (600-1½)	1360-2 566 (600-2)

ELEV 794 D TDZE 794



MIRL Rwy 8L-26R L
REIL Rwys 8L, 17 and 26R L
HIRL Rwys 8R-26L and 17-35 L

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026