WAAS CH 82608 W17A	APP CRS 167°	Rwy Ldg 5002 / TDZE 294 / Apt Elev 295

RNAV (GPS) RWY 17
TACOMA NARROWS (TIW)


RNP APCH.


VDP NA with McChord Fld altimeter setting. For inoperative MALSR, increase LPV all Cats visibility to 1⅛ mile. Circling NA east of Rwy 17/35.
Baro-VNAV NA when using McChord Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use McChord Fld altimeter setting and increase all DA 25 feet, all MDA 40 feet, and increase LPV all Cats visibility ⅛ mile.


MALSR

MISSED APPROACH: Climb to 4000 direct WAPGI and right turn via 285° track to CARRO and hold, continue climb-in-hold to 4000.

ATIS	SEATTLE APP CON	TACOMA TOWER ★	GND CON	UNICOM
124.05	120.1 290.9	118.5 (CTAF) L 253.5	121.8	122.95

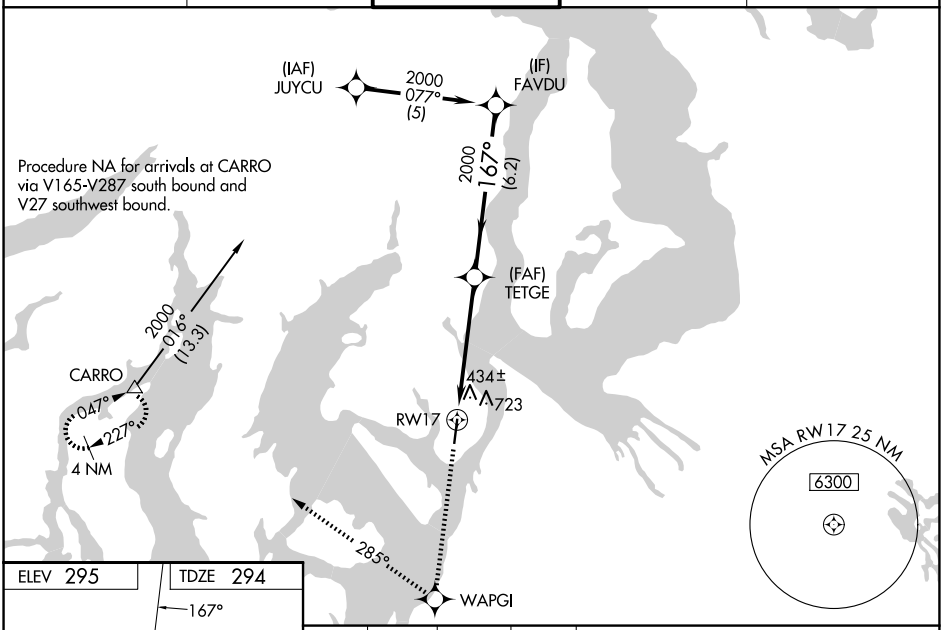

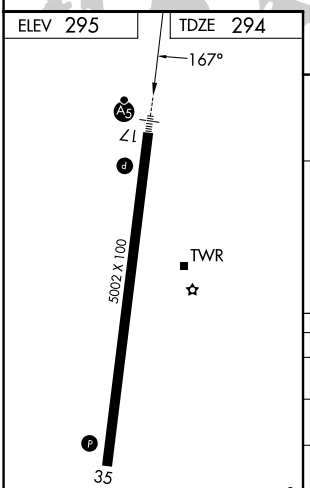

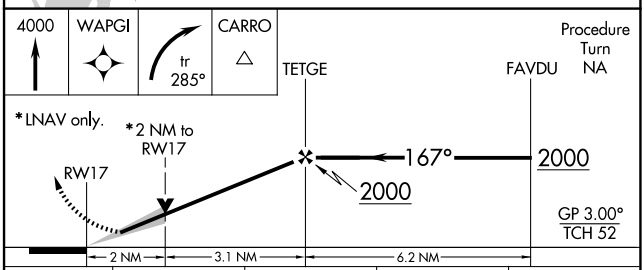

CATEGORY	A	B	C	D
LPV DA	638-⅝ 344 (400-⅝)			
LNAV/VNAV DA	992-2 698 (700-2)			
LNAV MDA	980-½ 686 (700-½)		980-1½ 686 (700-1½)	
CIRCLING	980-1 685 (700-1)		980-2 685 (700-2)	980-2¼ 685 (700-2¼)

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026