RNAV (GPS) RWY 17L

GRAND FORKS INTL (GFK)


WAAS	APP CRS	Rwy Ldg	3901
CH 72747	174°	TDZE	843
W17B		Apt Elev	845


RNP APCH - GPS.


Rwy 17L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.

MISSED APPROACH: Climb to 2600 direct BAYYG and hold.

ATIS	GRAND FORKS APP CON ★	GRAND FORKS TOWER ★	GND CON	UNICOM
119.4	118.1 318.1	118.4 (CTAF) L 350.35 (17R/35L, 9L/27R) 120.55 350.35 (17L/35R, 9R/27L)	124.575	122.95

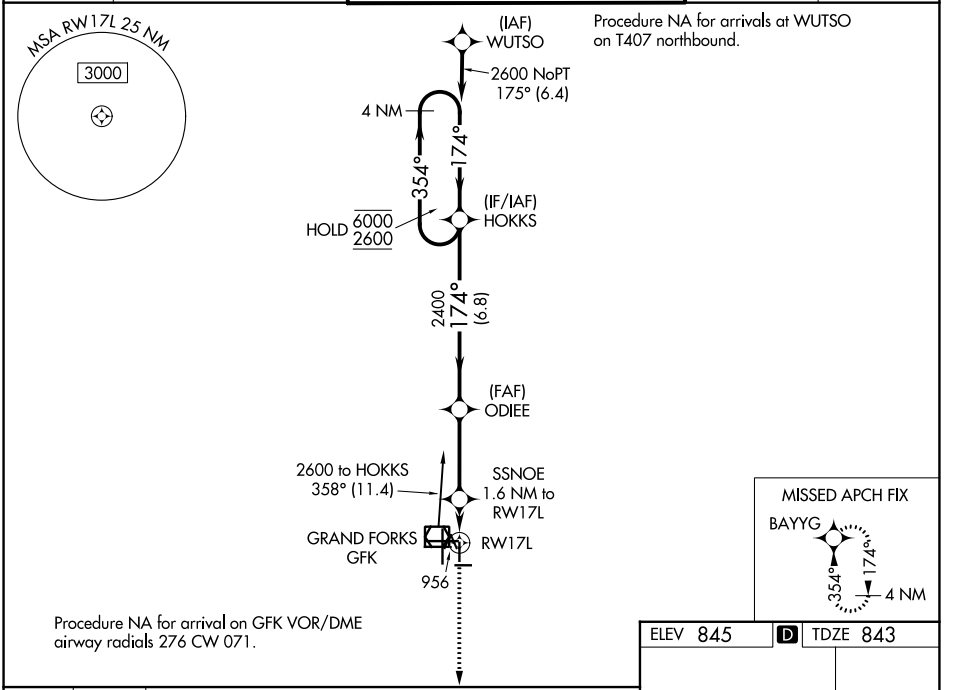

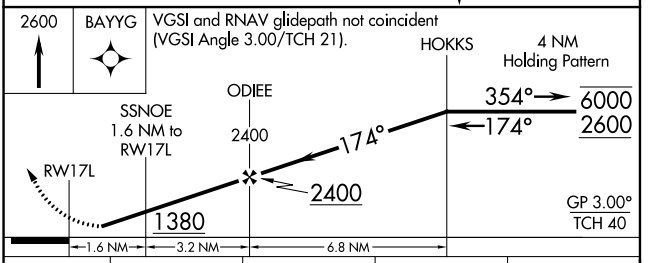



CATEGORY	A	B	C	D
LPV DA	1093-¾	250 (300-¾)		
LNAV/VNAV DA	1117-⅞	274 (300-⅞)		
LNAV MDA	1220-1	377 (400-1)		
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)

MIRL Rwys 9L-27R, 9R-27L and 17L-35R L
HIRL Rwy 17R-35L L
REIL Rwys 17R, 9L, and 27R L

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026