RNAV (GPS) RWY 23

MADISONVILLE RGNL (2I0)


WAAS	APP CRS	Rwy Ldg	6051
CH 77911	235°	TDZE	418
W23A		Apt Elev	439


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Evansville altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Evansville altimeter setting and increase LPV DA to 773 feet and all visibilities ¼ SM, LNAV/VNAV DA to 829 feet and all visibilities ⅜ SM, increase all MDA 100 feet and LNAV Cats C/D visibility ⅛ SM. For inop ALS, increase LPV and LNAV/VNAV all Cats and LNAV Cat C/D visibility ⅛ SM. For inop ALS when using Evansville altimeter setting, increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ SM.


ODALS

MISSED APPROACH: Climb to 2600 direct CELES and hold.

AWOS-3	EVANSVILLE APP CON ★	CLNC DEL	UNICOM
126.475	124.025 290.9	120.1	122.7 (CTAF) L

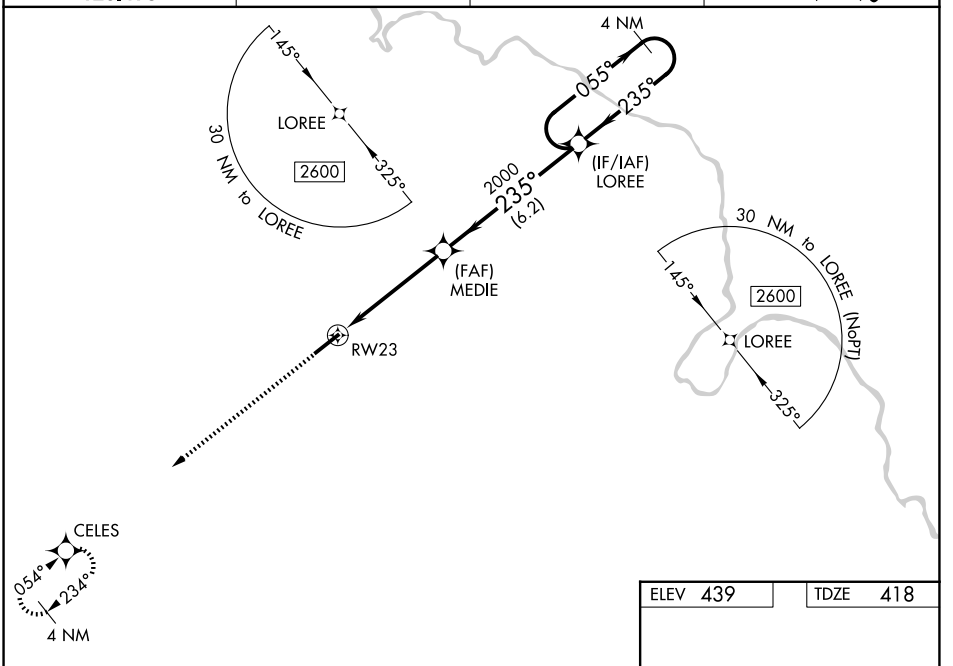

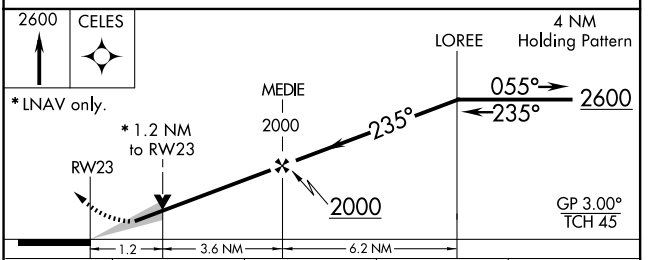

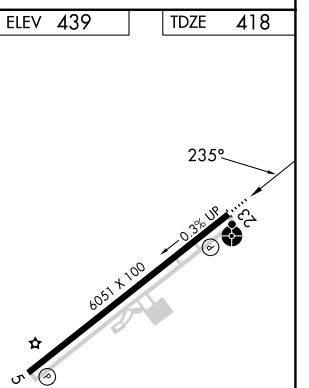

CATEGORY	A	B	C	D
LPV DA	674-¾	256 (300-¾)		
LNAV/VNAV DA	730-⅞	312 (300-⅞)		
LNAV MDA	840-¾	422 (500-¾)	840-1⅛	422 (500-1⅛)
CIRCLING	860-1 421 (500-1)	900-1 461 (500-1)	920-1½ 481 (500-1½)	1340-3 901 (1000-3)

HIRL Rwy 5-23 L
REIL Rwy 5 L

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026