WAAS	APP CRS	Rwy Ldg	6051
CH 82512	054°	TDZE	439
W05A		Apt Elev	439

RNAV (GPS) RWY 5


MADISONVILLE RGNL (2I0)


RNP APCH - GPS.


Baro-VNAV and VDP NA when using EVV altimeter setting. Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use EVV altimeter setting and increase LPV DA to 788 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 818 feet and all visibilities ⅛ SM; increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2600 direct LOREE and hold.

AWOS-3	EVANSVILLE APP CON ★	CLNC DEL	UNICOM
126.475	124.025 290.9	120.1	122.7 (CTAF) L

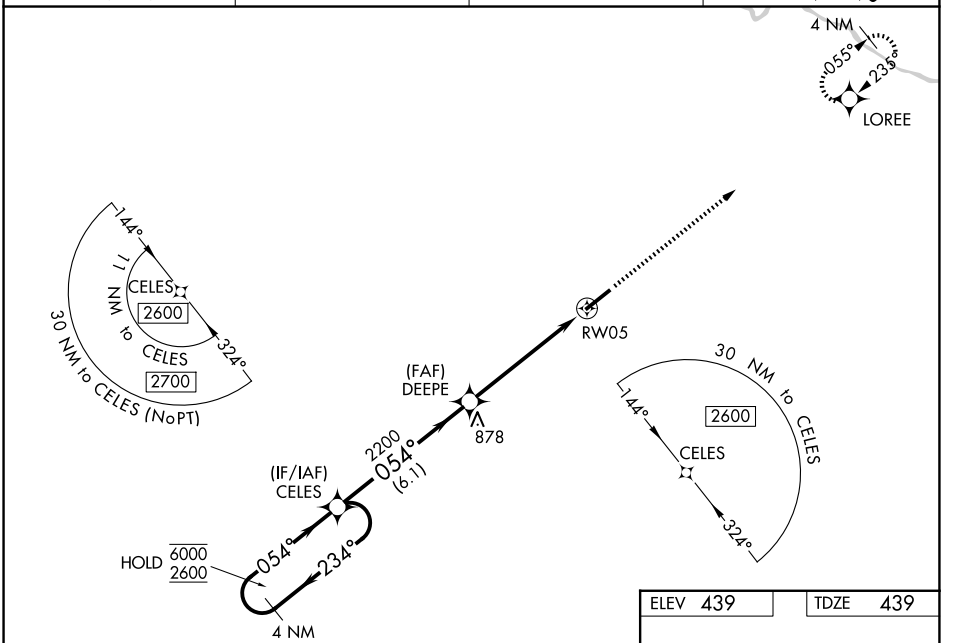

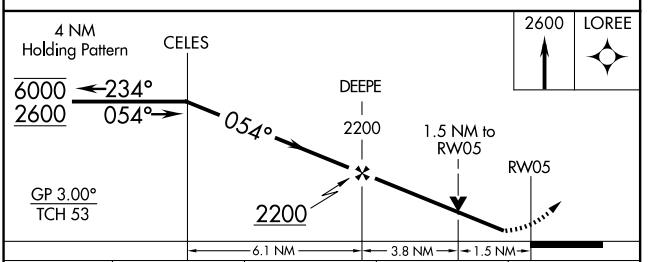



CATEGORY	A	B	C	D
LPV DA	689-¾	250 (300-¾)		
LNAV/VNAV DA	719-⅞	280 (300-⅞)		
LNAV MDA	980-1	541 (600-1)	980-1⅝	541 (600-1⅝)
CIRCLING	980-1	541 (600-1)	980-1⅝ 541 (600-1⅝)	1340-3 901 (1000-3)

HIRL Rwy 5-23 L
REIL Rwy 5 L

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026