RNAV (GPS) RWY 23

SUMTER (SMS)

WAAS	APP CRS	Rwy Ldg	5501
CH 58141	230°	TDZE	182
W23A		Apt Elev	182


RNP APCH.

Circling NA to Rwys 14 and 32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS increase LNAV/VNAV Cat A/B visibility to ⅞ SM.


ODALS

MISSED APPROACH: Climb to 600 then climbing left turn to 2400 direct GAUGH and hold.


AWOS-3	SHAW APP CON ★	UNICOM
118.075	125.4	122.7 (CTAF) L

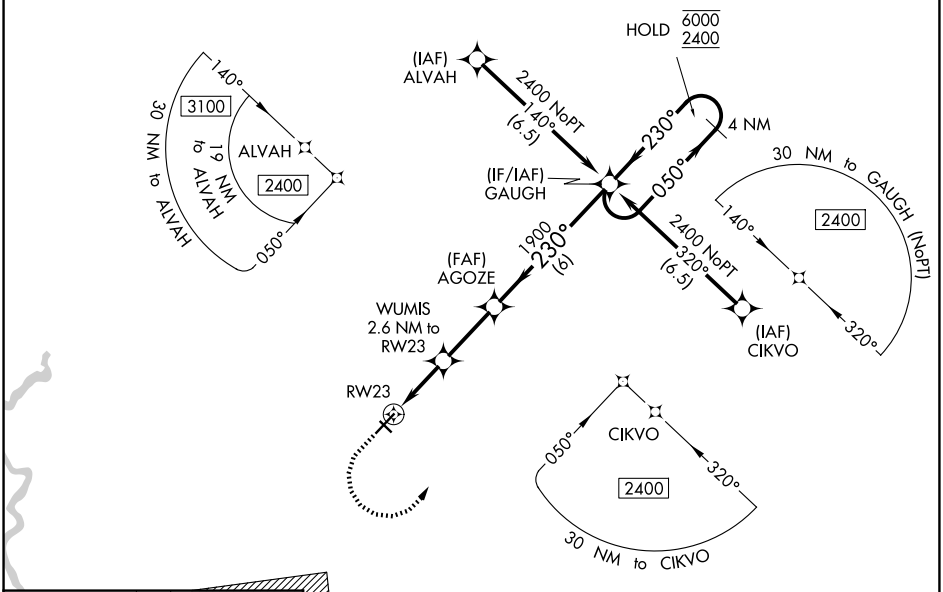

ELEV 182 TDZE 182 R-6002A



MIRL Rwy 5-23 L
REIL Rwys 5 and 23 L

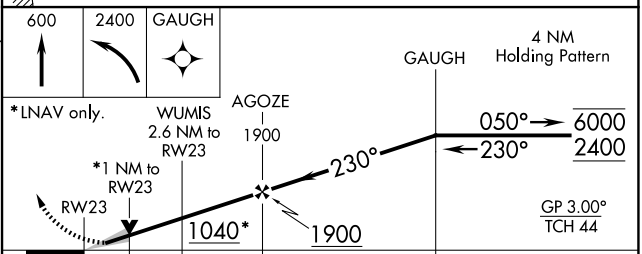

CATEGORY	A	B	C	D
LPV DA	382-¾ 200 (200-¾)			
LNAV/VNAV DA	460-¾ 278 (300-¾)			
LNAV MDA	540-¾ 358 (400-¾)		540-⅞ 358 (400-⅞)	
CIRCLING	600-1 418 (500-1)	680-1 498 (500-1)	1000-2½ 818 (900-2½)	1000-2¾ 818 (900-2¾)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026