RNAV (GPS) RWY 5


SUMTER (SMS)


WAAS CH 61215 W05A	APP CRS 050°	Rwy Ldg 5501 TDZE 181 Apt Elev 182

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Procedure NA when R-6002A is active. Circling NA to Rwy 14-32. When local altimeter setting not received, use Camden altimeter setting and increase all DA 65 feet and all MDA 80 feet and LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D, and Circling Cats C/D visibilities ¼ mile. VDP and Baro/VNAV NA when using Camden altimeter setting.


MISSED APPROACH: Climb to 2400 direct GAUGH and hold.

AWOS-3	SHAW APP CON*	UNICOM
118.075	125.4	122.7 (CTAF) L

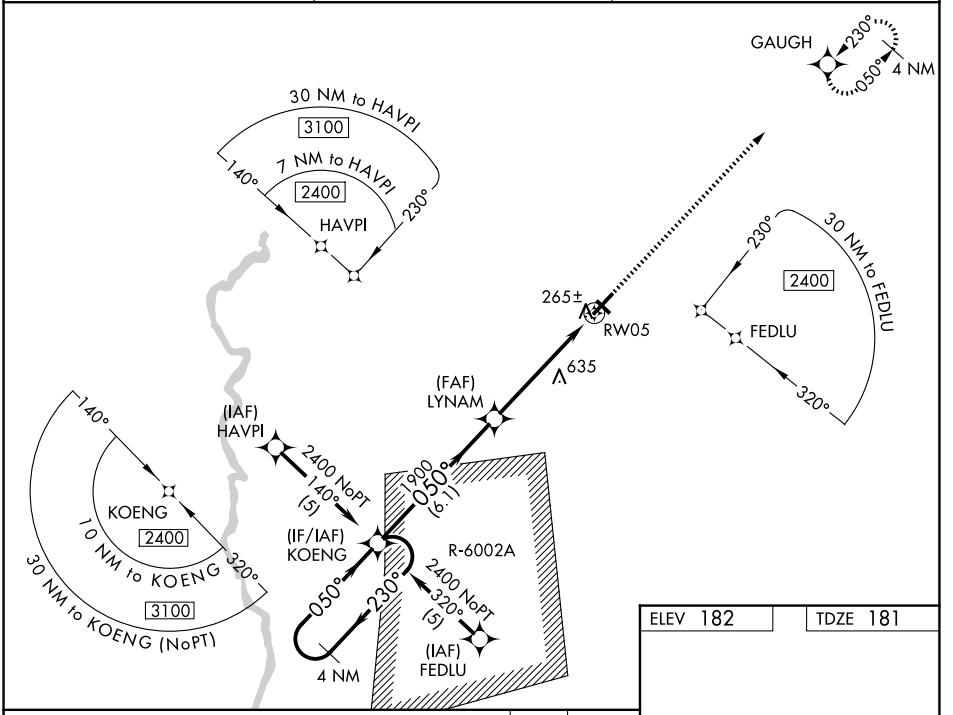

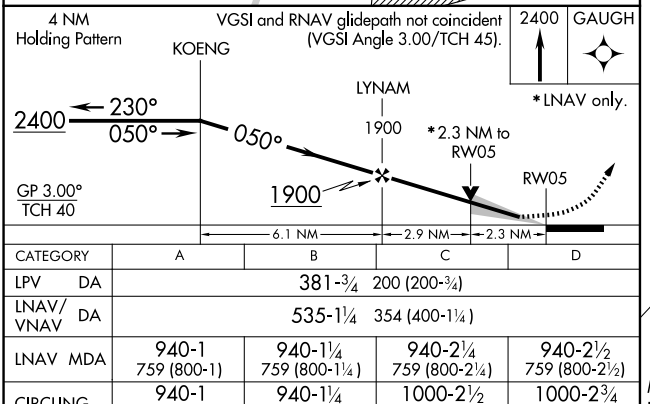

CATEGORY	A	B	C	D
LPV DA	381-¾ 200 (200-¾)			
LNAV/VNAV DA	535-1¼ 354 (400-1¼)			
LNAV MDA	940-1 759 (800-1)	940-1¼ 759 (800-1¼)	940-2¼ 759 (800-2¼)	940-2½ 759 (800-2½)
CIRCLING	940-1 758 (800-1)	940-1¼ 758 (800-1¼)	1000-2½ 818 (900-2½)	1000-2¾ 818 (900-2¾)

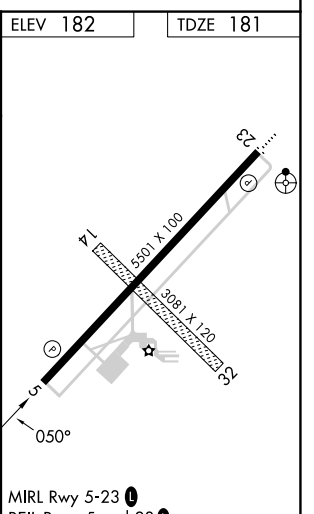

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026