RNAV (GPS) RWY 25

AIKEN RGNL (AIK)

WAAS	APP CRS	Rwy Ldg	5500
CH 50301	246°	TDZE	515
W25A		Apt Elev	529


RNP APCH.

Baro-VNAV NA when using Augusta Rgnl at Bush Fld altimeter setting.
NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 40°C. VDP NA with Augusta Rgnl at Bush Fld altimeter setting. When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting: increase LPV all Cats DA to 869 feet, LNAV/VNAV all Cats DA to 927 feet and all visibilities ⅜ mile; increase all MDA 120 feet and Cat C/D visibilities ¼ mile. For inop ODALS, increase LPV all Cats visibility to ⅞ mile, LNAV/VNAV all Cats to 1⅛ mile and LNAV Cat C/D to 1¼ mile. For inop ODALS when using Augusta Rgnl at Bush Fld altimeter setting, increase LPV all Cats visibility to 1¼ mile, LNAV/VNAV all Cats to 1½ mile and LNAV Cat D to 1⅝ mile.


ODALS

MISSED APPROACH: Climb to 3000 direct VIXLY and hold.


AWOS-3PT	AUGUSTA APP CON★	UNICOM
118.025	119.15 284.625	122.8 (CTAF) L

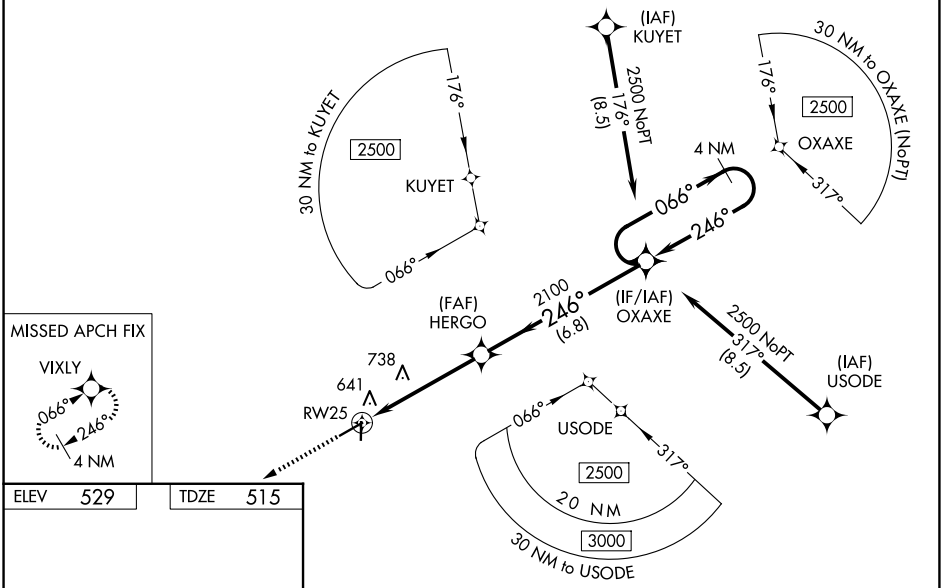

ELEV 529	TDZE 515



REIL Rwy 25
MIRL Rwy 7-25 L

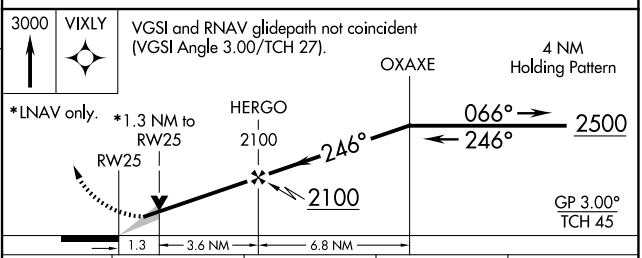

CATEGORY	A	B	C	D
LPV DA	765-¾ 250 (300-¾)			
LNAV/VNAV DA	823-1 308 (300-1)			
LNAV MDA	940-¾ 425 (500-¾)		940-1⅛ 425 (500-1⅛)	

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026