RNAV (GPS) RWY 9

ANOKA COUNTY/BLAINE (JANES FLD) (ANE)


WAAS	APP CRS	Rwy Ldg	5000
CH 82312	089°	TDZE	910
W09A		Apt Elev	912


RNP APCH - GPS.


When local altimeter setting not received, use Crystal altimeter setting: increase LPV DA to 1246 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1373 feet; increase all MDA 40 feet and LNAV Cat C/D visibility ⅛ SM and Circling Cat D visibility ¼ SM. Baro-VNAV and VDP NA when using Crystal altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3100 direct JUDAL and hold.

ATIS	MINNEAPOLIS APP CON	ANOKA TOWER★	GND CON	UNICOM
120.625	126.5 335.65	132.4 (CTAF) L	121.85	122.95

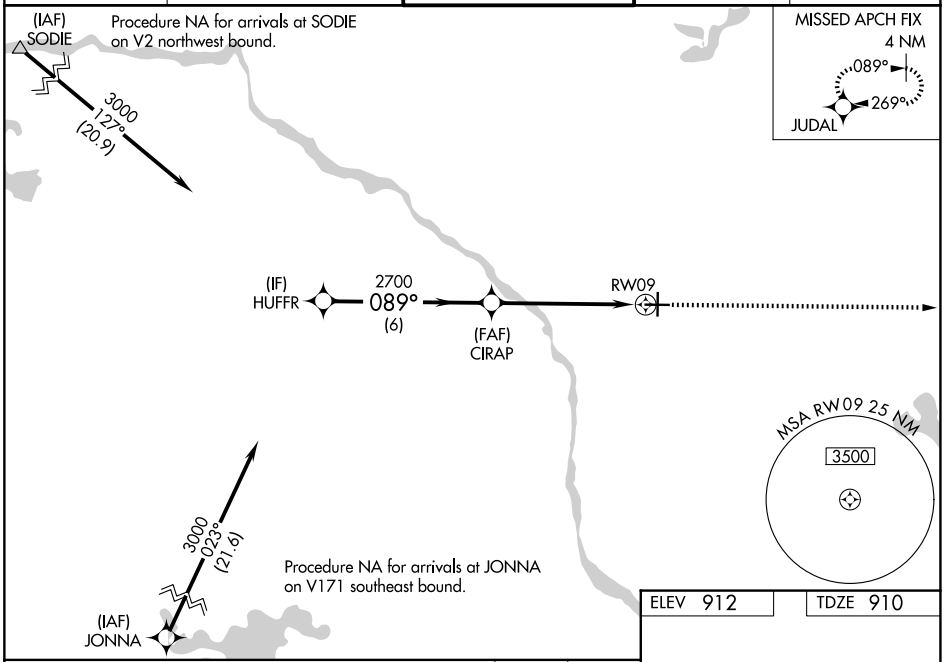

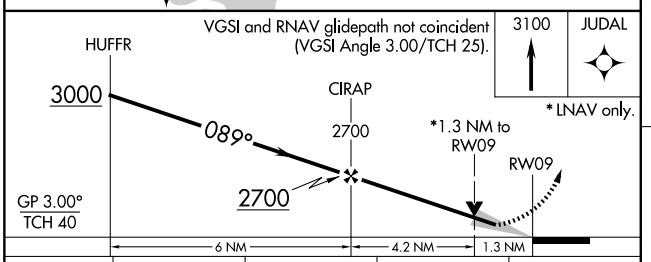



CATEGORY	A	B	C	D
LPV DA	1225-⅞ 315 (400-⅞)			
LNAV/VNAV DA	1352-1⅜ 442 (500-1⅜)			
LNAV MDA	1340-1 430 (500-1)		1340-1¼ 430 (500-1¼)	
CIRCLING	1400-1 488 (500-1)		1460-1½ 548 (600-1½)	1580-2 668 (700-2)

HIRL Rwy 9-27 L
MIRL Rwy 18-36 L
REIL Rwys 9, 18 and 36 L

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026