RNAV (GPS) RWY 3

APPLETON INTL (ATW)

WAAS	APP CRS	Rwy Ldg	8002
CH 56223	028°	TDZE	888
W03A		Apt Elev	918


RNP APCH - GPS.


V A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use GRB altimeter setting and increase LPV DA to 1219 feet and all visibilities to RVR 2600; increase LNAV/VNAV DA to 1313 feet and all visibilities to RVR 4000; increase all MDAs 100 feet and LNAV visibility Cat C/D ⅜ SM and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using GRB altimeter setting. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cat C/D visibility to 1⅜ SM.


MALSR

MISSED APPROACH: Climb to 2700 direct ASIGE and hold.

ATIS	GREEN BAY APP CON★	APPLETON TOWER★	GND CON	UNICOM
127.15	126.3 338.2	119.6 (CTAF) L	121.7	122.95

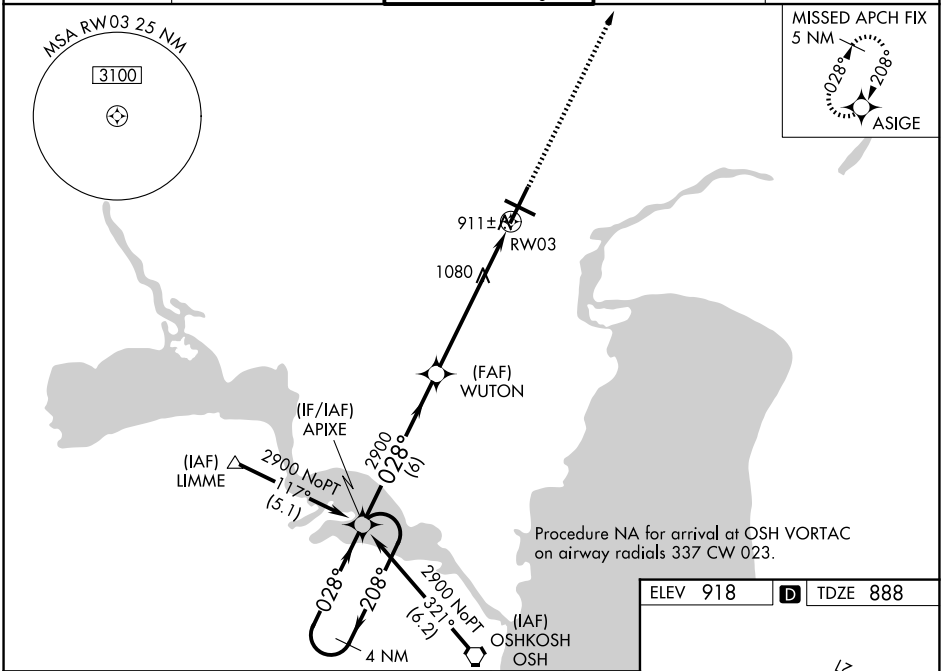

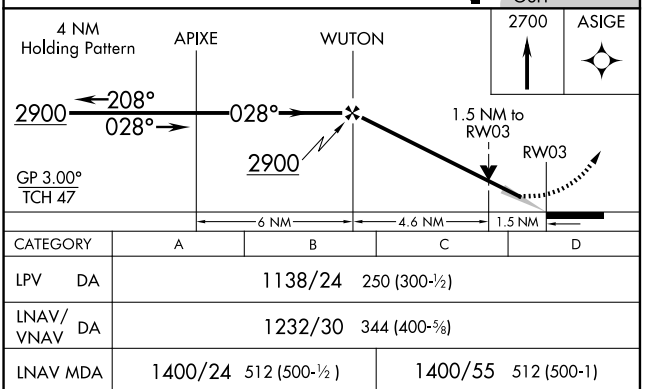

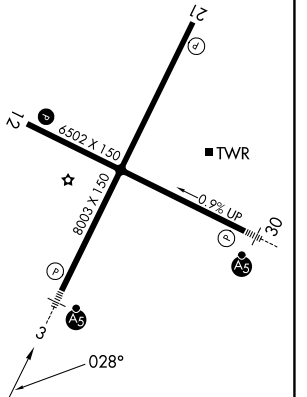

CATEGORY	A	B	C	D
LPV DA	1138/24 250 (300-½)			
LNAV/VNAV DA	1232/30 344 (400-⅝)			
LNAV MDA	1400/24 512 (500-½)		1400/55 512 (500-1)	
CIRCLING	1400-1 482 (500-1)		1400-1½ 482 (500-1½)	1480-2 562 (600-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026