WAAS	APP CRS	Rwy Ldg	5722
CH 42726	234°	TDZE	443
W23A		Apt Elev	459

RNAV (GPS) RWY 23


MOORE COUNTY (SOP)

RNP APCH.


T Baro-VNAV NA when using Sanford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Sanford altimeter setting and increase all DA 88 feet and all MDA 100 feet; increase LNAV Cats C/D visibility 3/8 mile and Circling Cat C visibility ½ mile.
A Rwy 23 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2500 direct HEBNO and hold.

AWOS-3PT	FAYETTEVILLE APP CON	UNICOM
127.575	127.8 343.725	123.05 (CTAF) L

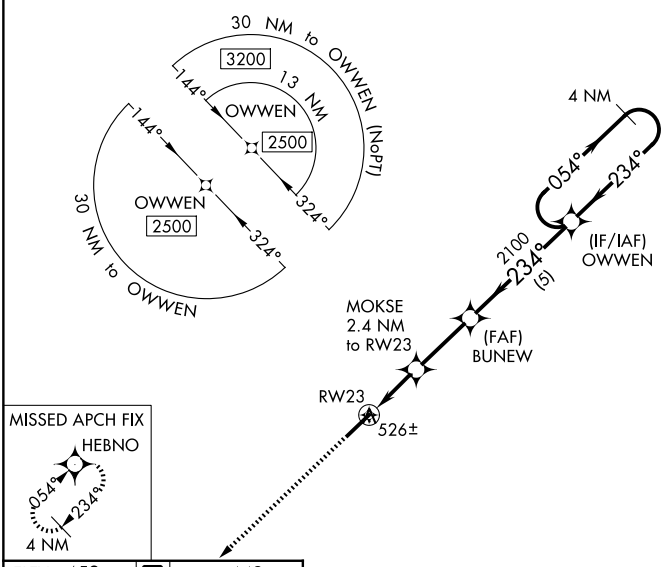

ELEV 459 D TDZE 443



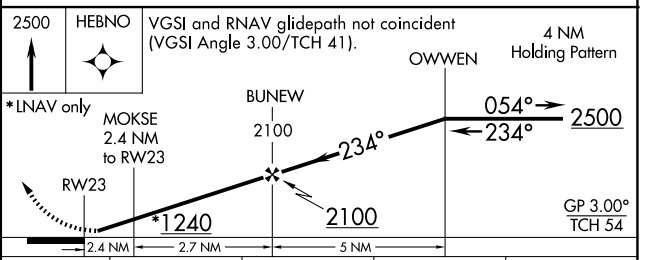

CATEGORY	A	B	C	D
LPV DA	693-1 250 (300-1)			
LNAV/VNAV DA	699-1 256 (300-1)			
LNAV MDA	780-1 337 (400-1)			
CIRCLING	880-1 421 (500-1)	920-1 461 (500-1)	1100-1¾ 641 (700-1¾)	1360-3 901 (1000-3)

REIL Rwy 23 L
HIRL Rwy 5-23 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026