CLTCH THREE DEPARTURE (RNAV)

(CLTCH3.CLTCH) 31DEC20

WINCHESTER, VIRGINIA
WINCHESTER RGNL (OKV)

POTOMAC DEP CON
120.45 306.925
AWOS-3PT
124.85
CLNC DEL
126.15
UNICOM
122.975 (CTAF)

TOP ALTITUDE: 3000


DEPARTURE ROUTE DESCRIPTION


Climb on heading assigned by ATC, expect RADAR vectors to BUTRZ, then on track 239° to CLTCH, thence. . . .

. . . . on assigned transition, maintain altitude assigned by ATC, expect clearance to filed altitude within ten (10) minutes after departure.

FLASK TRANSITION (CLTCH3.FLASK)
MAULS TRANSITION (CLTCH3.MAULS)

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbo-jets only.
NOTE: Takeoff Rwy 32 requires a climb to 2500 on heading 341° before proceeding on the ATC assigned heading for obstacle avoidance.

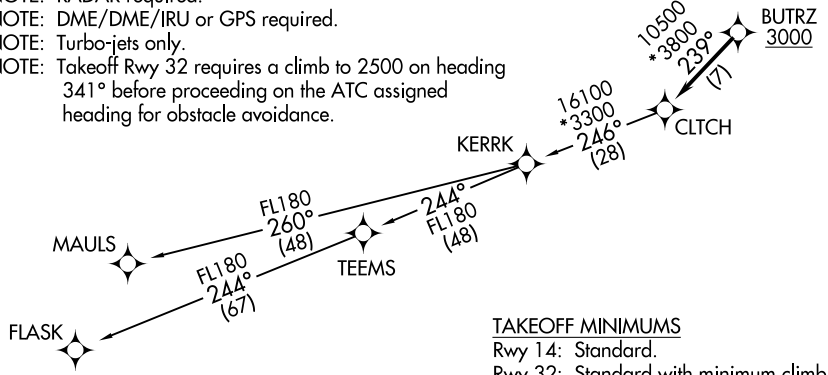





TAKEOFF MINIMUMS
Rwy 14: Standard.
Rwy 32: Standard with minimum climb of 240′ per NM to 1900.

NOTE: Chart not to scale.

(CLTCH3.CLTCH) 26246

CLTCH THREE DEPARTURE (RNAV)

AL-5251 (FAA)

WINCHESTER RGNL (OKV)
WINCHESTER, VIRGINIA