SCRAM SIX DEPARTURE (RNAV)

(SCRAM6.SCRAM) 31DEC20

WINCHESTER, VIRGINIA
WINCHESTER RGNL (OKV)

POTOMAC DEP CON
120.45 306.925
AWOS-3PT
124.85
CLNC DEL
126.15
UNICOM
122.975 (CTAF)

TOP ALTITUDE: 3000

N

P-56B


P-56A

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, expect RADAR vectors to POOCH, then on track 240° to SCRAM, thence. . . .

. . . . as depicted. Maintain 3000, expect clearance to filed altitude within ten (10) minutes after departure.

GLANC TRANSITION (SCRAM6.GLANC):

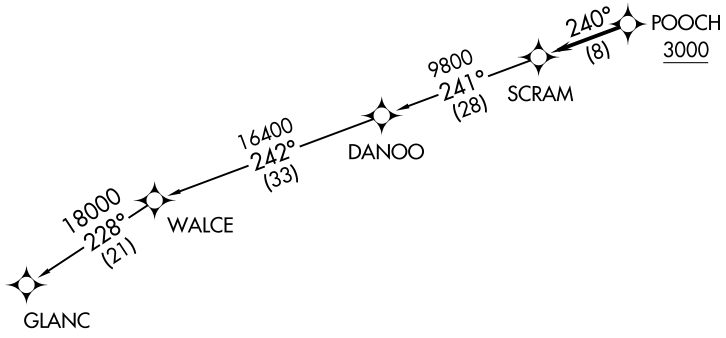

TAKEOFF MINIMUMS
Rwy 14: Standard.
Rwy 32: Standard with minimum climb of 240′ per NM to 1900.

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbo-jets only.
NOTE: Takeoff Rwy 32 requires a climb to 2500 on heading 341° before proceeding on the ATC assigned heading for obstacle avoidance.

NOTE: Chart not to scale.

(SCRAM6.SCRAM) 26246
SCRAM SIX DEPARTURE (RNAV)

AL-5251 (FAA)

WINCHESTER RGNL (OKV)
WINCHESTER, VIRGINIA