
VORTAC CEW	APP CRS	Rwy Ldg	N/A
115.9	106°	TDZE	N/A
Chan 106		Apt Elev	214


VOR-A
BOB SIKES (CEW)


Circling NA for Cat D west of Rwy 17-35. When local altimeter setting not received, use Eglin AFB altimeter setting and increase all MDA 60 feet and increase Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1200 then climbing left turn to 2200 direct CEW VORTAC and hold.

ASOS	EGLIN APP CON	UNICOM
119.275	124.05 284.65	123.075 (CTAF) L

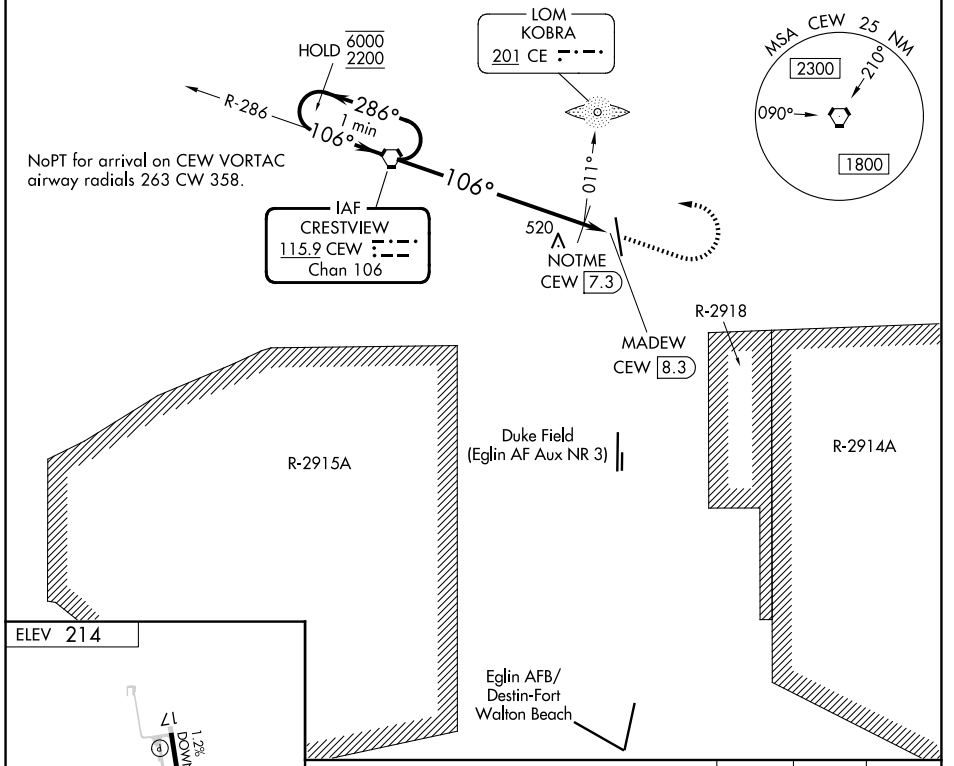

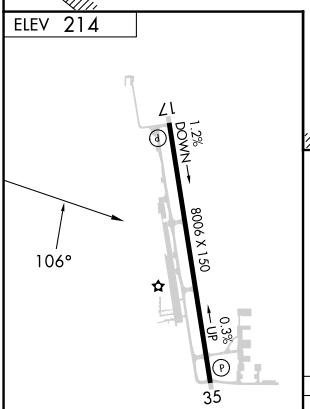

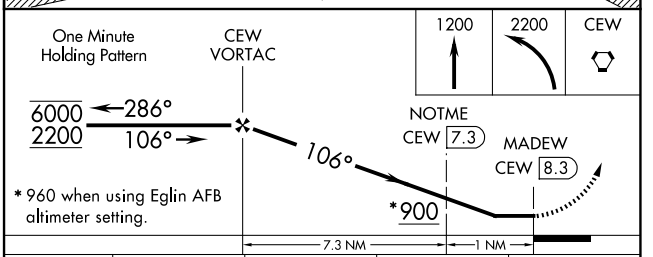

* 960 when using Eglin AFB altimeter setting.

HIRL Rwy 17-35 L

FAF to MAP 8.3 NM

Knots	60	90	120	150	180
Min:Sec	8:18	5:32	4:09	3:19	2:46

CATEGORY	A	B	C	D
CIRCLING	900-1 686 (700-1)		900-2 686 (700-2)	900-2¼ 686 (700-2¼)
NOTME FIX MINIMUMS (ADF OR DME REQUIRED)				
CIRCLING	700-1 486 (500-1)		820-1¾ 606 (700-1¾)	840-2 626 (700-2)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026