RNAV (GPS) RWY 23

JONESBORO MUNI (JBR)

WAAS CH 65806 W23A	APP CRS 230°	Rwy Ldg 6200 TDZE 262 Apt Elev 262


RNP APCH.


Circling NA northwest of Rwy 5-23. Circling Rwy 31 NA at night. Baro-VNAV and VDP NA when using Walnut Ridge altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LPV Cat A/B visibility to ⅞ SM. Inop table does not apply to LNAV/VNAV. For inop ALS when using Walnut Ridge altimeter setting, increase LPV Cat A/B visibility to 1 SM. When using Walnut Ridge altimeter setting, inop table does not apply to LNAV/VNAV. When local altimeter setting not received, use Walnut Ridge altimeter setting: increase LPV DA to 600 feet, LNAV/VNAV DA to 630 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM.


ODALS


MISSED APPROACH: Climb to 2300 direct YIGUY and hold.

ASOS	MEMPHIS CENTER	UNICOM
118.525	120.075 289.4	123.0 (CTAF) L

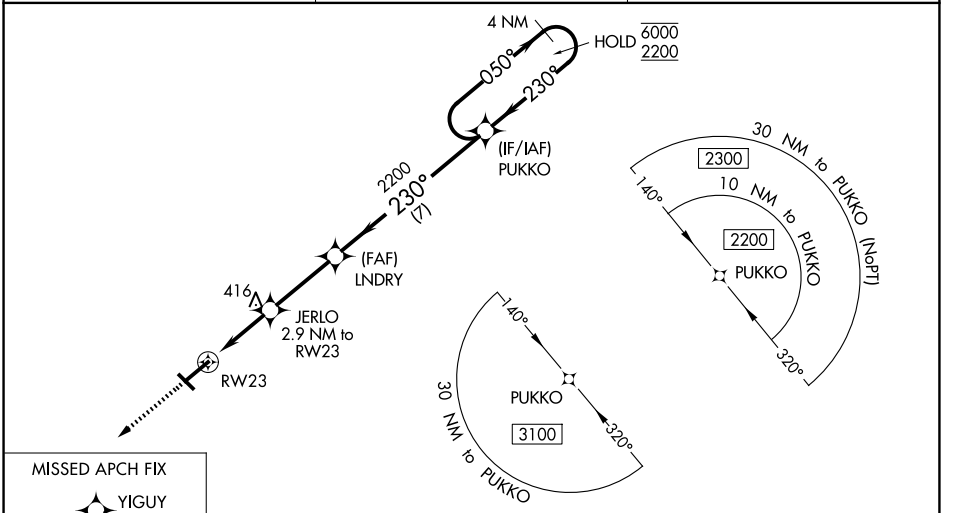



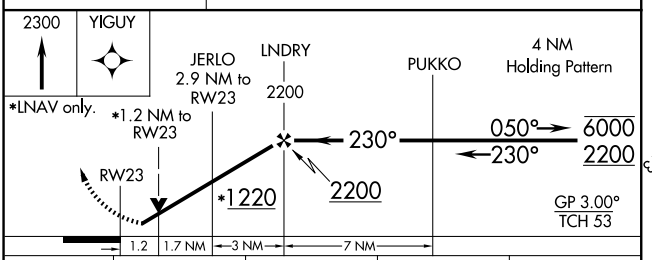

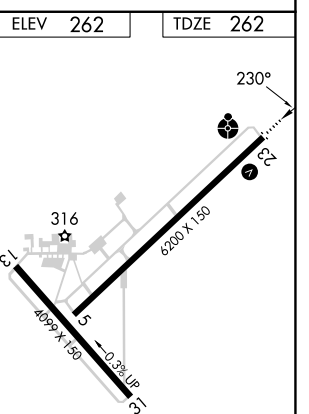

CATEGORY	A	B	C	D
LPV DA	546-¾ 284 (300-¾)			
LNAV/VNAV DA	576-⅞ 314 (400-⅞)			
LNAV MDA	680-¾ 418 (500-¾)		680-1 418 (500-1)	
CIRCLING	740-1 478 (500-1)		820-1½ 558 (600-1½)	1080-2¾ 818 (900-2¾)

MIRL Rwys 5-23 and 13-31 L

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026