RNAV (GPS) RWY 23
MOUNT VERNON (MVN)

WAAS CH 58010 W23A	APP CRS 231°	Rwy Ldg 5572 / TDZE 471 / Apt Elev 480


RNP APCH - GPS.


T A Baro-VNAV and VDP NA when using ENL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. Circling Rwy 15, 33 NA at night. When local altimeter setting not received, use ENL altimeter setting and increase LPV DA to 716 feet; increase LNAV/VNAV DA to 985 feet; increase all MDAs 60 feet and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1⅜ SM.


MALSR

MISSED APPROACH: Climb to 3000 direct GEJTO and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.2	127.7 351.825	123.0 (CTAF) L

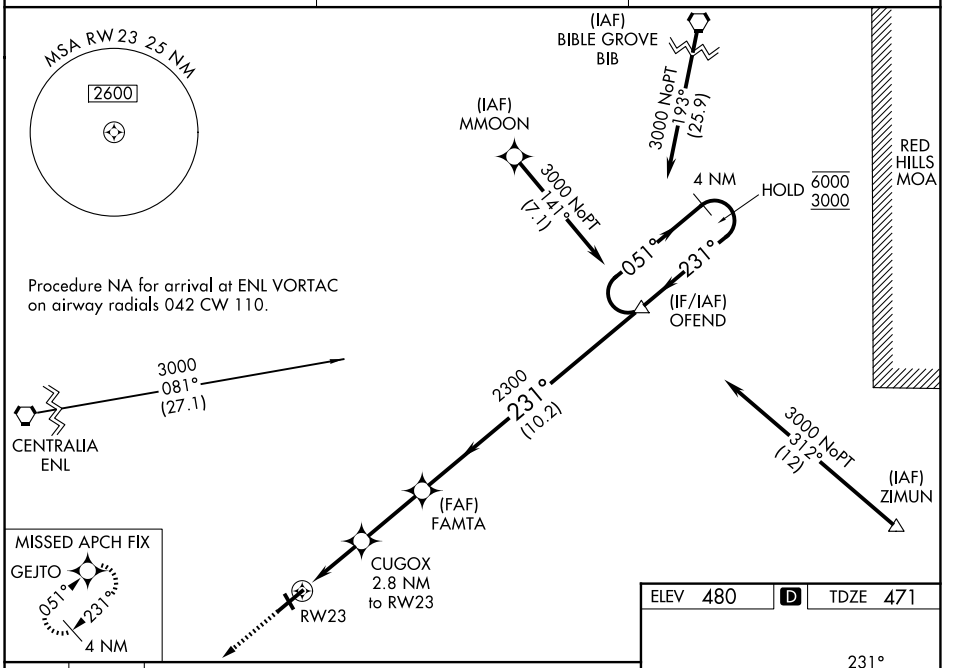

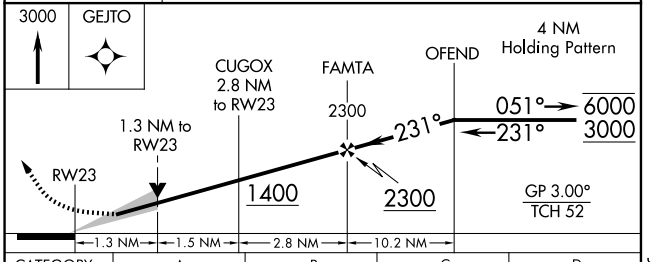

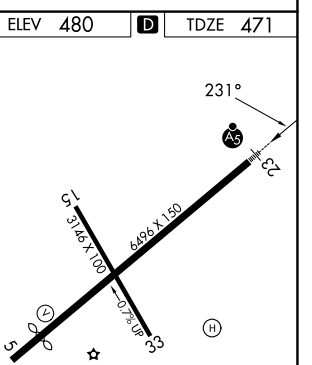

CATEGORY	A	B	C	D
LPV DA	671-½	200 (200-½)		
LNAV/VNAV DA	940-1	469 (500-1)		
LNAV MDA	940-½	469 (500-½)	940-1	469 (500-1)
CIRCLING	980-1 500 (500-1)	1000-1 520 (600-1)	1140-1¾ 660 (700-1¾)	1380-3 900 (900-3)

HIRL Rwy 5-23 L
MIRL Rwy 15-33 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026