WAAS	APP CRS	Rwy Ldg 5010
CH 53304	010°	TDZE 979
W01A		Apt Elev 979


RNAV (GPS) RWY 1


BARABOO/WISCONSIN DELLS RGNL (DLL)

Baro-VNAV NA when using Lone Rock altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lone Rock altimeter setting and increase all DA 97 feet/MDA 100 feet. Increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats visibility ⅜ mile, LNAV Cat C visibility ⅜ mile, and Circling Cat C visibility ½ mile. Circling NA to Rwy 14-32. Rwy 1 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct NOYIL and on track 011° to ZAVOX and hold.

AWOS-3	MADISON APP CON★	UNICOM
118.325	135.45 343.7	123.05 (CTAF) L

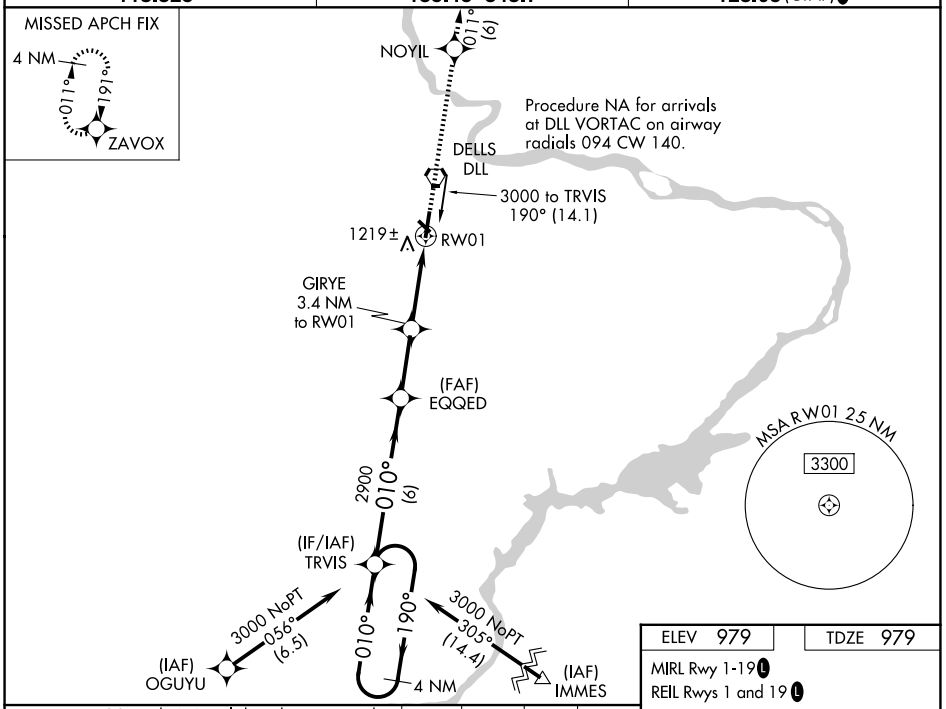

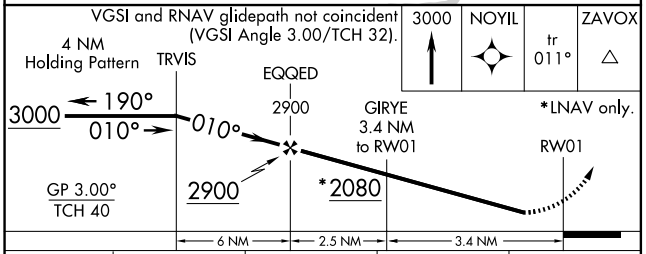


CATEGORY	A	B	C	D
LPV DA	1229-1 250 (300-1)			NA
LNAV/VNAV DA	1391-1⅜ 412 (500-1⅜)			NA
LNAV MDA	1480-1 501 (600-1)		1480-1⅜ 501 (600-1⅜)	NA
CIRCLING	1520-1 541 (600-1)		1580-1¾ 601 (700-1¾)	NA

ELEV 979 TDZE 979

MIRL Rwy 1-19 L

REIL Rwys 1 and 19 L

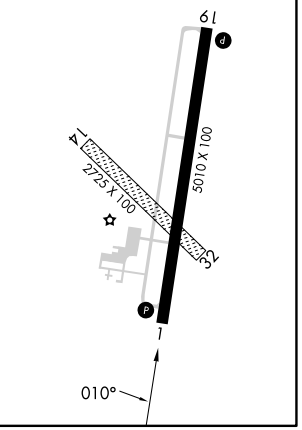

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026