RNAV (GPS) RWY 27L

MIAMI EXEC (TMB)


WAAS CH 56400 W27A	APP CRS 273°	Rwy Ldg 6000 TDZE 8 Apt Elev 10

RNP APCH.


Circling Rwy 13, 31 NA at night. Rwy 27L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. VDP and Baro-VNAV NA when using Miami Intl altimeter setting. When local altimeter setting not received, use Miami Intl altimeter setting and increase LPV DA to 235 feet, LNAV/VNAV DA to 368 feet and all MDA 40 feet, increase LNAV Cats C/D visibility ¼ SM.


MISSED APPROACH: Climb to 2000 direct HAXAM and hold.

ATIS	MIAMI APP CON	MIAMI EXEC TOWER★	GND CON
124.0	125.5 354.1	118.9 (CTAF) L	121.7

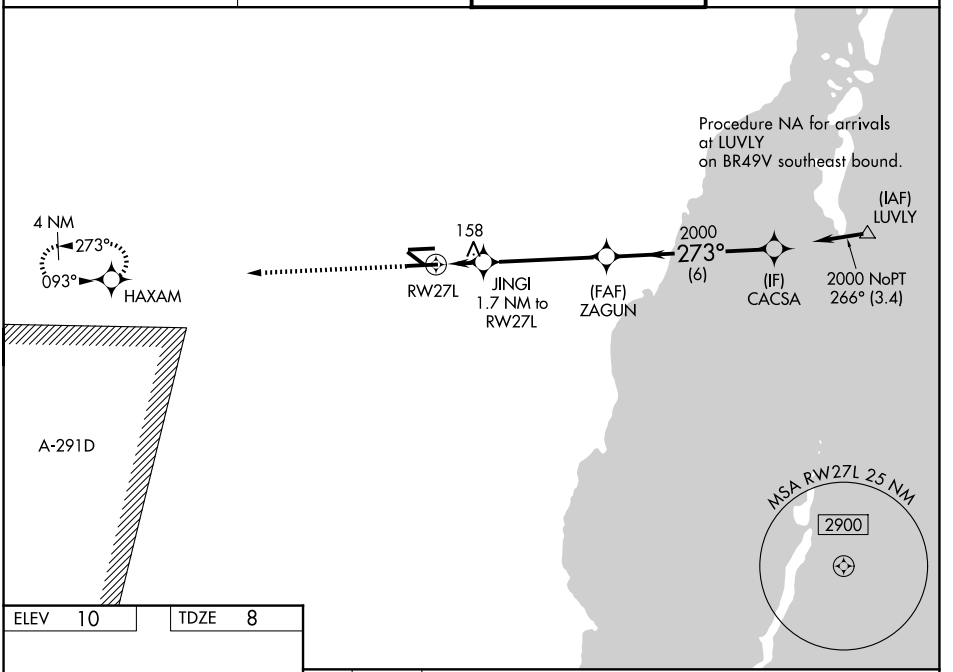

ELEV 10 TDZE 8



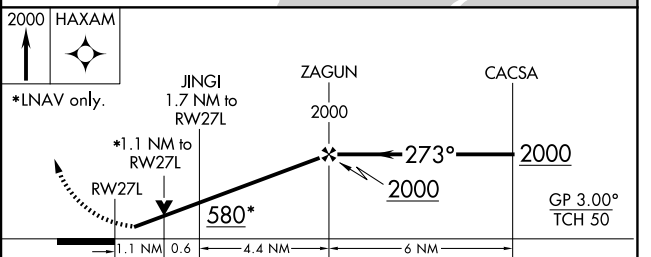

CATEGORY	A	B	C	D
LPV DA	208-¾ 200 (200-¾)			
LNAV/VNAV DA	341-1⅛ 333 (400-1⅛)			
LNAV MDA	420-1 412 (500-1)		420-1⅛ 412 (500-1⅛)	
CIRCLING	460-1 450 (500-1)	560-1 550 (600-1)	640-1¾ 630 (700-1¾)	640-2 630 (700-2)

REIL Rwy 13
HIRL Rwy 9R-27L L
MIRL Rwy 9L-27R
MIRL Rwy 13-31 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026