WAAS CH 93615 W27B	APP CRS 273°	Rwy Ldg 5003 TDZE 8 Apt Elev 10


RNAV (GPS) RWY 27R

MIAMI EXEC (TMB)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Intl altimeter setting and adjust all DA 27 feet and all MDA 40 feet; increase LPV all Cats visibility ¼ mile, LNAV Cat D visibility ¼ mile, and Circling Cat D visibility ¼ mile. Baro-VNAV NA when using Miami Intl altimeter setting. Circling to Rwy 13, 31 NA at night.


MISSED APPROACH: Climb to 2000 direct JULED and hold.

ATIS	MIAMI APP CON	MIAMI EXEC TOWER★	GND CON
124.0	125.5 354.1	118.9 (CTAF) L	121.7

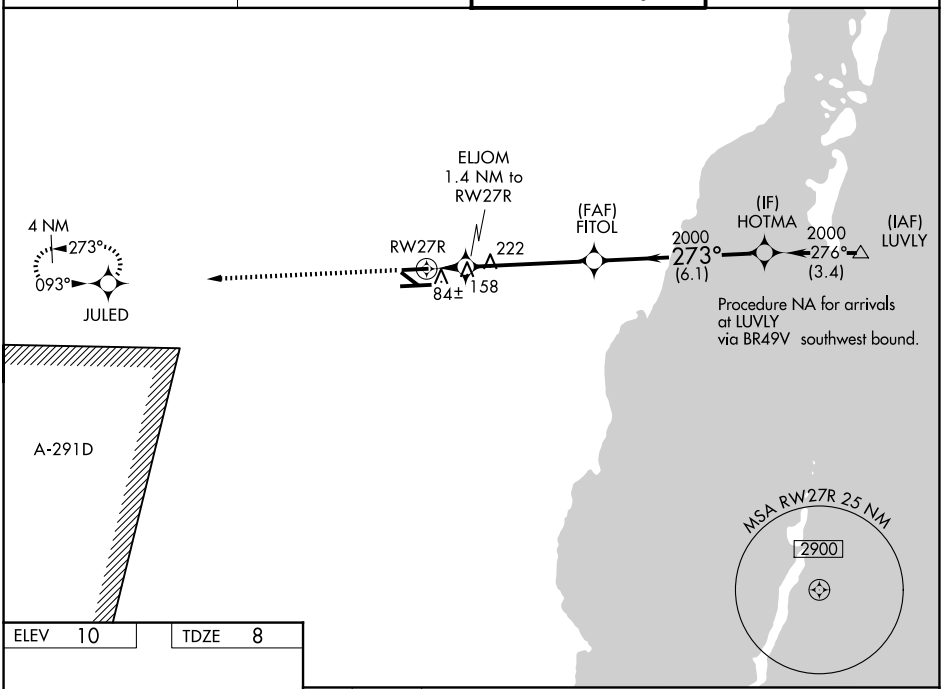

ELEV 10 TDZ 8



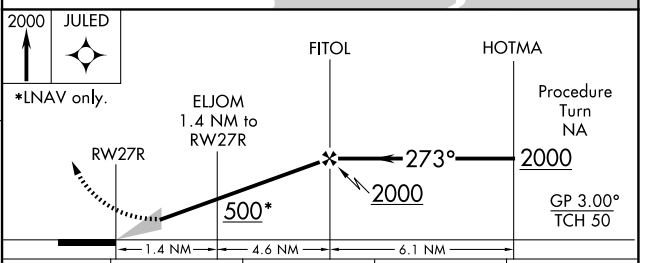

CATEGORY	A	B	C	D
LPV DA	258-¾ 250 (300-¾)			
LNAV/VNAV DA	352-1¼ 344 (400-1¼)			
LNAV MDA	420-1 412 (500-1)		420-1¼ 412 (500-1¼)	
CIRCLING	460-1 450 (500-1)	560-1 550 (600-1)	640-1¾ 630 (700-1¾)	640-2 630 (700-2)

REIL Rwy 13
HIRL Rwy 9R-27L L
MIRL Rwy 9L-27R
MIRL Rwy 13-31 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026