WAAS CH **99415** **W09B**	APP CRS **093°**	Rwy Ldg **5003** TDZE **8** Apt Elev **10**


RNAV (GPS) RWY 9L

MIAMI EXEC (TMB)


Circling Rwy 13,31 NA at night. Baro-VNAV NA when using Miami Intl altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA 27 feet and all MDA 40 feet; increase LPV all Cats visibility ¼ mile, LNAV Cat C visibility ¼ mile, and Circling Cat D visibility ¼ mile.


MISSED APPROACH: Climb to 2000 direct HOTMA and hold.

ATIS	MIAMI APP CON	MIAMI EXEC TOWER★	GND CON
124.0	**125.5 354.1**	**118.9** (CTAF) L	**121.7**

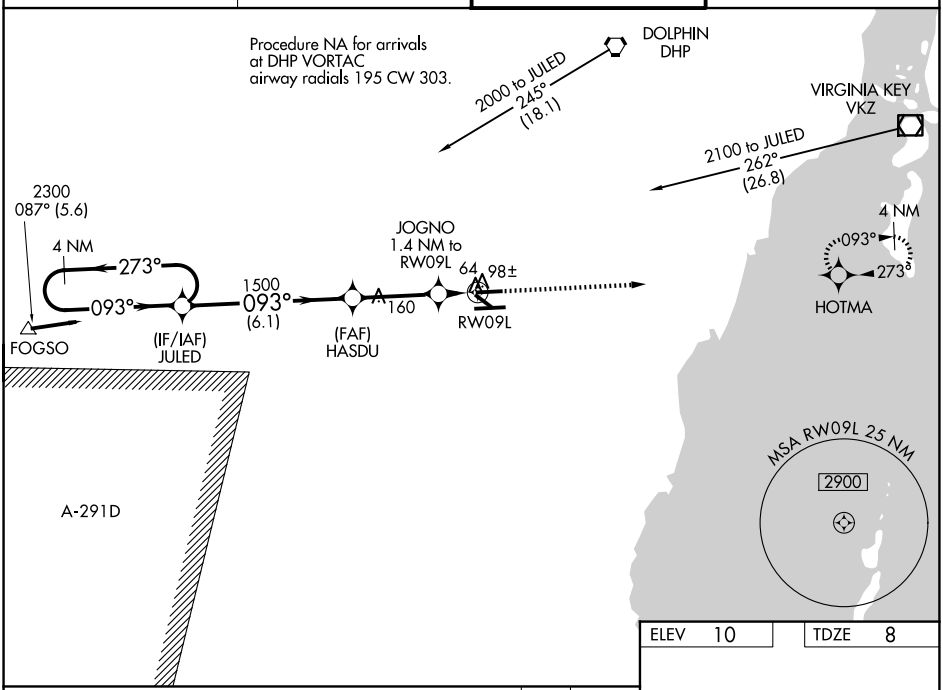

ELEV 10 TDZE 8

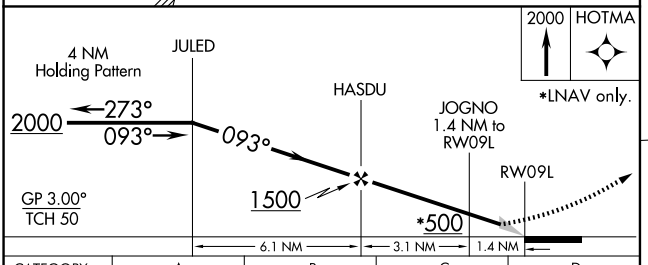



CATEGORY	A	B	C	D
LPV DA	258-¾ 250 (300-¾)			
LNAV/VNAV DA	364-1¼ 356 (400-1¼)			
LNAV MDA	380-1 372 (400-1)			380-1¼ 372 (400-1¼)
CIRCLING	460-1 450 (500-1)	560-1 550 (600-1)	640-1¾ 630 (700-1¾)	640-2 630 (700-2)

REIL Rwy 13
HIRL Rwy 9R-27L L
MIRL Rwy 9L-27R
MIRL Rwy 13-31 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026