RNAV (GPS) RWY 7

MARION MUNI (MNN)


WAAS	APP CRS	Rwy Ldg	5000
CH 93604	065°	TDZE	990
W07A		Apt Elev	993

RNP APCH - GPS.


When local altimeter setting not received, use OSU altimeter setting: increase LPV DA to 1327 feet; increase LNAV/VNAV DA to 1466 feet; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ⅛ SM, and Circling visibility Cat C/D ¼ SM. Baro-VNAV NA when using OSU altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Visibility reduction by helicopters NA.


MISSED APPROACH: Climb to 3000 direct LEBJE and hold.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
135.225	128.35 360.65	126.8	122.8 (CTAF) L

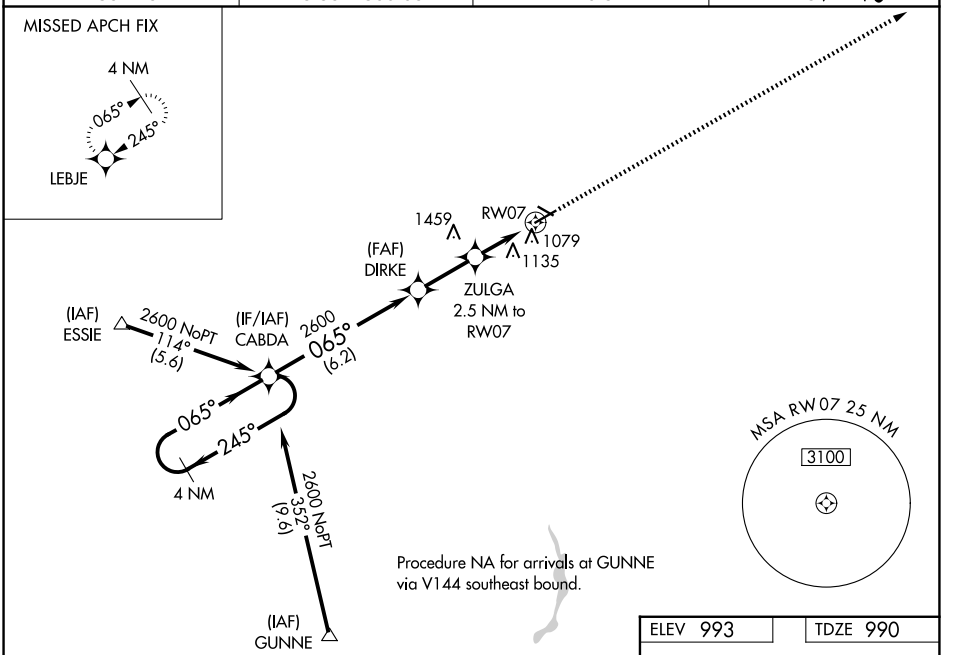

ELEV 993 TDZE 990

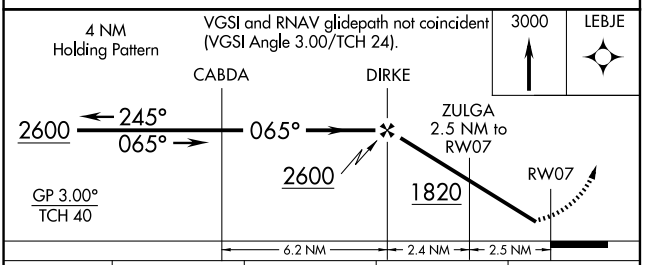



CATEGORY	A	B	C	D
LPV DA	1240-1 250 (300-1)			
LNAV/VNAV DA	1379-1½ 389 (400-1½)			
LNAV MDA	1440-1 450 (500-1)		1440-1⅜ 450 (500-1⅜)	1440-1½ 450 (500-1½)
CIRCLING	1480-1 487 (500-1)	1500-1 507 (600-1)	1700-2 707 (800-2)	1820-2¾ 827 (900-2¾)

REIL Rwys 7, 13, 25 and 31 L
MIRL Rwys 7-25 and 13-31 L

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026