WAAS	APP CRS	Rwy Ldg	5500
CH 90325	196°	TDZE	662
W20A		Apt Elev	666

RNAV (GPS) RWY 20


ROCK HILL/YORK COUNTY/BRYANT FLD (UZA)


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 39°C. When local altimeter setting not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 957 feet, LNAV/VNAV DA to 1084 feet, and all MDAs 60 feet; increase LPV visibility all Cats ⅛ SM, LNAV/VNAV visibility all Cats ¼ SM, and LNAV visibility Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Charlotte/Douglas Intl altimeter setting. Rwy 20 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 3000 direct CONEL and hold.

ASOS	CHARLOTTE APP CON		GCO	UNICOM
120.775	120.05	307.8	121.725	123.05 (CTAF) L

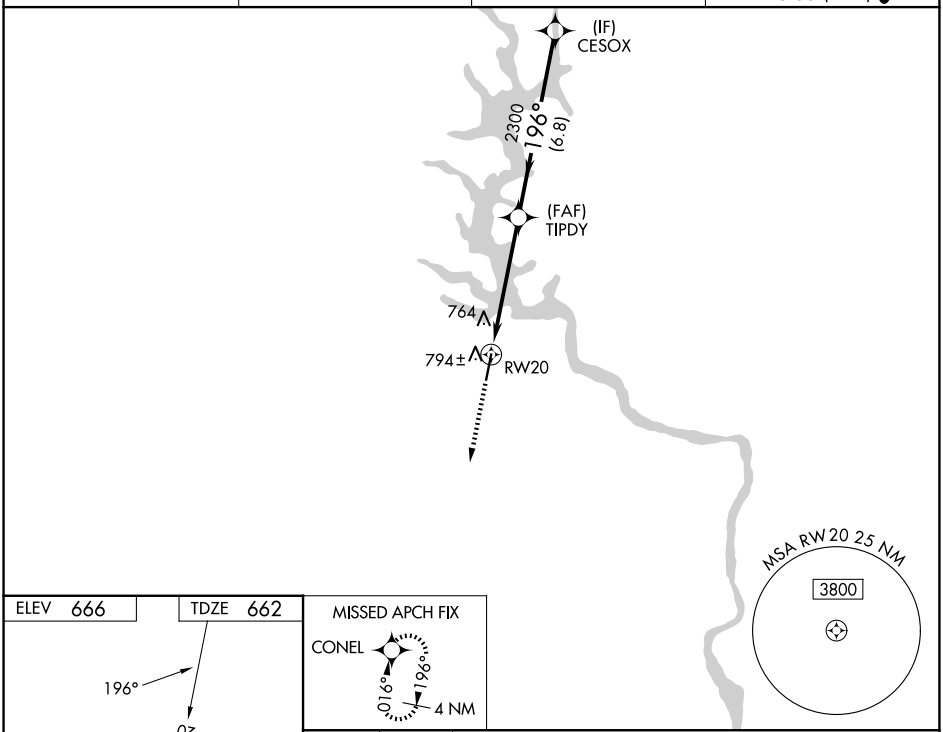

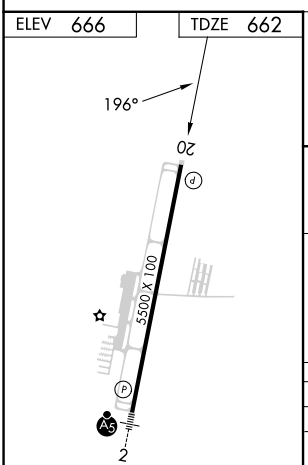

MIRL Rwy 2-20 L

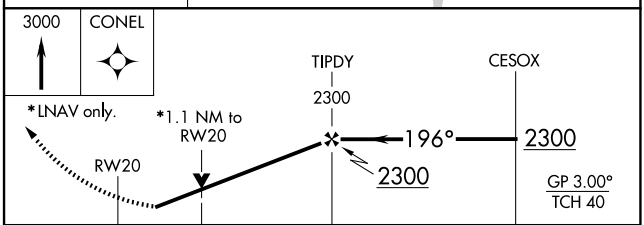

CATEGORY	A	B	C	D
LPV DA	912-¾ 250 (300-¾)			
LNAV/VNAV DA	1039-1 377 (400-1)			
LNAV MDA	1060-1 398 (400-1)		1060-1⅛ 398 (400-1⅛)	
CIRCLING	1140-1 474 (500-1)	1160-1 494 (500-1)	1340-2 674 (700-2)	1340-2¼ 674 (700-2¼)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026