RNAV (GPS) RWY 22

SHEBOYGAN COUNTY MEML INTL (SBM)

WAAS	APP CRS	Rwy Ldg	6801
CH 65904	217°	TDZE	743
W22A		Apt Elev	755


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cats C and D visibility to 1⅛ SM.


MALSR

MISSED APPROACH: Climb to 3000 direct TORRU and hold.

ASOS	MILWAUKEE APP CON	GCO	UNICOM
118.425	127.375 263.075	121.725	122.7 (CTAF) L

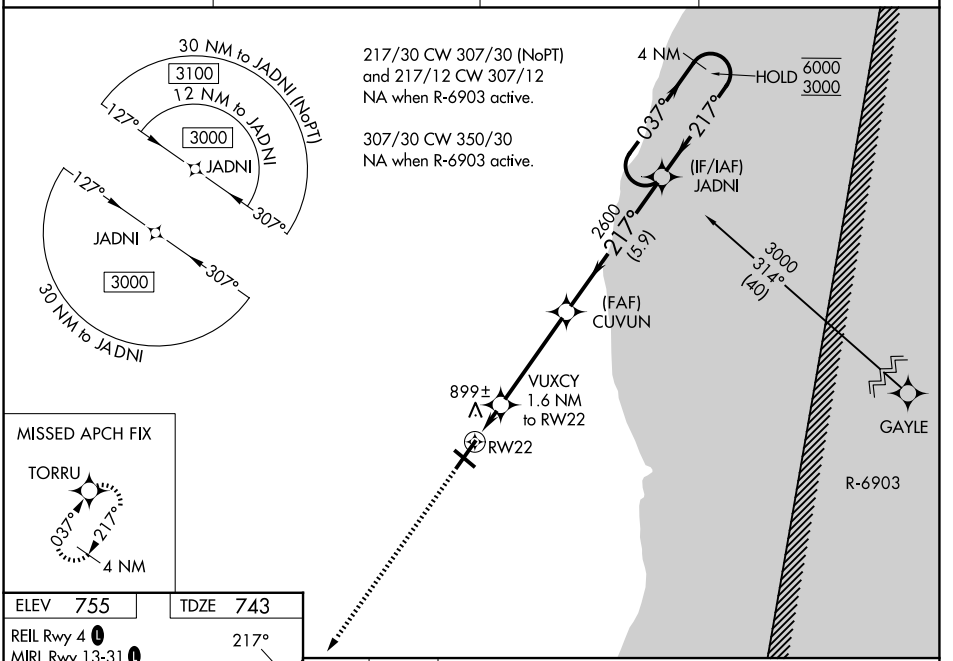

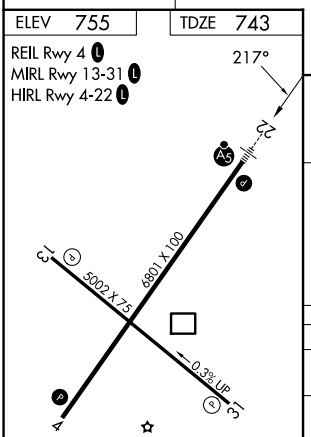

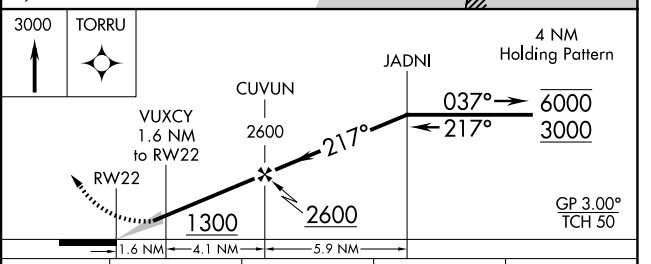

CATEGORY	A	B	C	D
LPV DA	943-½ 200 (200-½)			
LNAV/VNAV DA	1188-⅞ 445 (500-⅞)			
LNAV MDA	1160-½ 417 (500-½)		1160-¾ 417 (500-¾)	
CIRCLING	1200-1 445 (500-1)	1240-1 485 (500-1)	1340-1½ 585 (600-1½)	1360-2 605 (700-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026