RNAV (GPS) RWY 9R

OHIO STATE UNIVERSITY (OSU)

WAAS	APP CRS	Rwy Ldg	5004
CH 86420	092°	TDZE	905
W09A		Apt Elev	905

RNP APCH.


Baro-VNAV NA when using John Glenn Columbus Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. VDP NA with John Glenn Columbus Intl altimeter setting. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase LPV DA to 1140 feet; increase LNAV/VNAV DA to 1227 feet; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM, Cat D ¼ SM and Circling Cat D ¼ SM. Circling Rwy 23 NA at night. For inop ALS, increase LNAV/VNAV visibility all Cats to ⅞ SM.


MALSR

MISSED APPROACH: Climb to 3200 direct KOLNY and hold.

ATIS	COLUMBUS APP CON	STATE TOWER ★	GND CON	UNICOM
121.35	125.95 317.775	118.8 (CTAF) 254.325	121.7	122.95


Procedure NA for arrivals on APE VORTAC airway radials 189 CW 335.

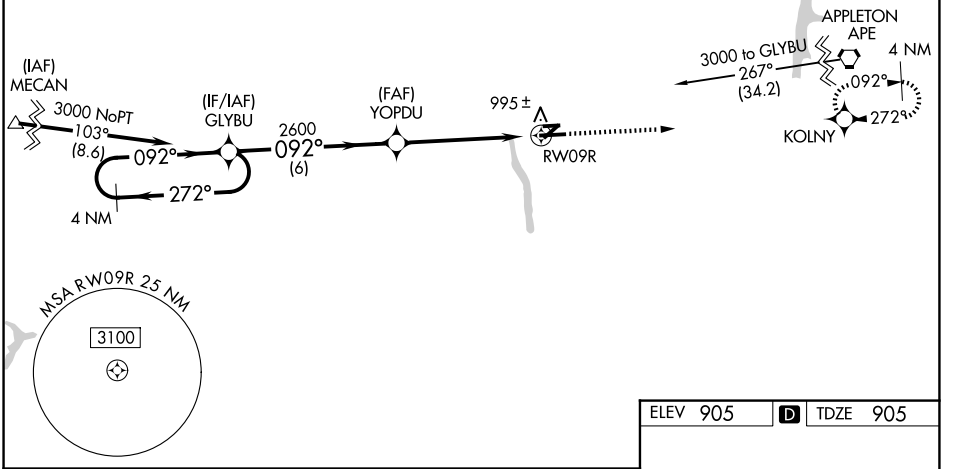

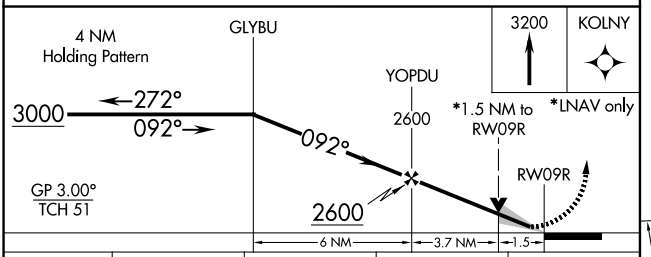

CATEGORY	A	B	C	D
LPV DA	1105-½ 200 (200-½)			
LNAV/VNAV DA	1192-½ 287 (300-½)			
LNAV MDA	1420-½ 515 (600-½)		1420-1 515 (600-1)	
CIRCLING	1420-1 515 (600-1)		1420-1½ 515 (600-1½)	1680-2½ 775 (800-2½)

ELEV 905 D TDZE 905



REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwys 9L-27R

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026